

Article

# Environmental Impact Assessment of Different Strategies for the Remanufacturing of User Electronics

Angad Mann <sup>1</sup>, Prateek Saxena <sup>2</sup>, Mohamed Almani <sup>1</sup>, Okechukwu Okorie <sup>3</sup> and Konstantinos Salonitis <sup>1,\*</sup>

<sup>1</sup> School of Aerospace, Transport and Manufacturing, Cranfield University, Cranfield MK43 0AL, UK; angadmann6@gmail.com (A.M.); mo.almani@gmail.com (M.A.)

<sup>2</sup> School of Engineering, Indian Institute of Technology Mandi, Mandi 175005, India; prateek@iitmandi.ac.in

<sup>3</sup> Exeter Centre for the Circular Economy, Streatham Court, University of Exeter, Rennes Drive, Exeter EX4 4PU, UK; o.s.okorie@exeter.ac.uk

\* Correspondence: k.salonitis@cranfield.ac.uk; Tel.: +44-(0)-1234-758347

**Abstract:** Over the years, the innovation and development of electrical and electronic equipment have been on a steep rise. Millions of electronics are being sold or discarded every year in the form of waste. Sustainable IT (Green IT or Circular Computing) is one of the most environment-friendly methods of reusing discarded or waste user electronics. The remanufacturing of a computer refers to the disassembly, repair, and upgrade of the original computer to give it a new life, along with a warranty that is as good as a new product. The goal of this work includes studying and assessing the total environmental impact of refurbishing a computer using life cycle assessment (LCA) integrated with discrete event simulation (DES), to compare two business models: (1) a case of centralized remanufacturing where the plants are in the Middle East, which is the hub for receiving waste electronics and distributing remanufactured goods; (2) a case of decentralized remanufacturing where the plants are situated in each continent for over a range of computer models. The environmental assessment was conducted using the openLCA software in combination with the WITNESS Horizon software for the DES. The results show that decentralized remanufacturing is a much more environmentally friendly option for the remanufacturing of computers, and the decentralized remanufacturing operation has a better throughput as well as efficiency, as compared to the centralized remanufacturing operation. The centralized remanufacturing scenario has a climate change impact of 1035.19 kg of CO<sub>2</sub>-Eq, as compared to the decentralized remanufacturing scenario with an impact of 816.12 kg of CO<sub>2</sub>-Eq. In terms of the impact on the marine life, decentralized remanufacturing was found to have 0.28 kg of N-Eq impact, as compared to centralized remanufacturing (0.22 kg of N-Eq). However, this does not give us a complete picture, as the environmental impact of the computer in its previous life remains unknown. Multi life cycle assessment is the assessment process that can be used to get a clearer picture of the ecological footprint of the computer during its multiple life cycles.

**Keywords:** sustainability; life cycle assessment; discrete event simulation; supply chain; remanufacturing

**Citation:** Mann, A.; Saxena, P.; Almani, M.; Okorie, O.; Salonitis, K. Environmental Impact Assessment of Different Strategies for the Remanufacturing of User Electronics. *Energies* **2022**, *15*, 2376. <https://doi.org/10.3390/en15072376>

Academic Editor: Wen-Hsien Tsai

Received: 9 February 2022

Accepted: 21 March 2022

Published: 24 March 2022

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).


## 1. Introduction

The constant evolution of electrical and electronic components (EEE), especially for information and communication devices such as laptops, computers, and mobile phones, has posed a grave issue for the ever-growing waste of electrical and electronic equipment (WEEE) [1,2]. According to the Global E-Waste monitor report for 2020, about 53.6 MT (53.6 mega-tons) of e-waste was generated in 2020. The majority of this e-waste was generated in Asia (24.9 MT) and the American continents (13.1 MT). Europe generated a total of 12 MT of e-waste in the year 2020 [3]. Government bodies and private companies worldwide are looking for methods to reduce the environmental impact of electronics

waste. The constant upgrading of products, rapidly evolving manufacturing technologies, and fast market penetration have been significant factors for the increasing electrical waste as the newer models quickly replace the older products [1]. The innovation of electrical equipment is one of the critical aspects of the generation of waste electrical and electronic equipment (WEEE) [1]. Suhariyanto et al. discuss the impact of the evolution speed of various products as a contributing factor towards the generation of waste when these products reach their end-of-life phases. The products are segregated into four groups based on their evolution speeds and lifetimes [4]. Group 1 consists of the products with a slow evolution speed and a shorter lifetime. This group consists of products like polyethylene terephthalate (PET) bottles, steel cans, etc. These products have a lower cost of manufacturing and can be either reused or recycled without disassembling them. These products are made using a single material for one-time use. Group 2 comprises of the products with a short evolution speed and a long lifetime. Products falling under this category are furniture, automotive parts, etc. These products have a longer lifetime and at the end of their lifetime, these products can be reused or remanufactured, recycled with disassembly to extract the raw materials, or redesigned into a different product with a different function. Group 3 refers to the products with a fast evolution speed and a shorter lifetime. The group consists of consumer electronics such as mobile phones, laptops, computers, etc. These materials can be reused or remanufactured, recycled with disassembly to extract the raw materials, or the parts can be replaced to upgrade the product to be reused. The fast evolution speed and a shorter lifetime of these products make these products one of the primary reasons for the generation of waste. Group 4 comprises of the products with a fast evolution speed but a longer lifetime. The products under this category are lightings, photocopying machines, display products, etc. Even though these products have a fast evolution speed, due to the longer lifetime of these products, the waste treatment methods used are reuse or remanufacturing, or upgradation of products using better parts and recycling of the products to extract raw materials.


Various products have different lifetimes which include the extraction of raw materials, production, usage, and end-of-life product phases. This process shows the product life cycle for various products. Products coming from various market product life cycle (M-PLC) phases have other service times and end-of-life routes [1]. For example, a product sold during the decay process of the M-PLC seems to have a shorter operational life than one sold during the implementation period [1].

Figure 1 shows the path of a multi life cycle product for its “N” life cycles. When the product reaches the end-of-life phase for its first life cycle, the product can go through different routes depending on the condition of the product. If the product is in highly good condition, the product is sold to another user after some minor repairs to have the same quality as its first life cycle. This route is defined as repairing the product. Another route that the product may take is remanufacturing. Remanufacturing refers to reconditioning and replacing IT hardware and restoring the efficiency to that of a newer model, with a warranty matching an equivalent new product [5]. Products that can be reused and/or remanufactured are classified as multi life cycle (MLC) products [4].

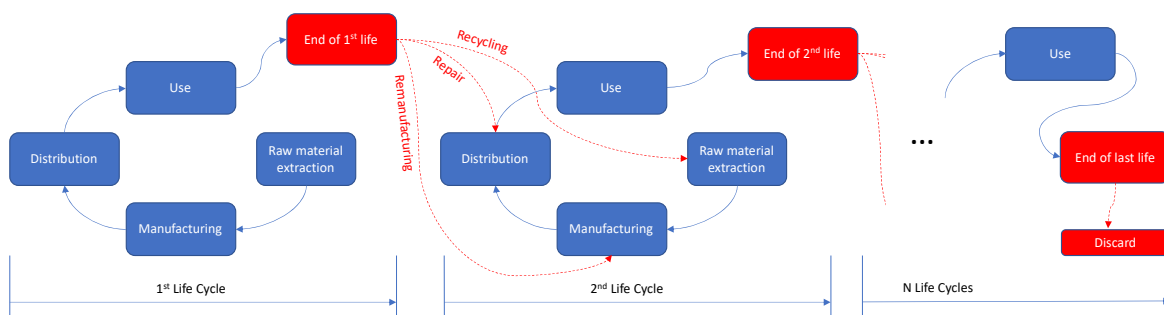

**Figure 1.** Life cycle of the M-PLC products.

In 2003, Williams and Sasaki evaluated the end-of-life (EOL) options for desktop and laptop computers. The authors compared three EOL options: resell to secondary markets, upgrade the key components, and recycle to obtain primary materials. The authors concluded that the options of reselling and upgrading are far more beneficial from an environmental standpoint as compared to recycling, as the decline of lifetime naturally leads to higher savings than recycling, since the majority of the energy input is in the shape of the product, not its materials content [6]. Figure 2 shows the different paths waste user electronics can follow before being formally disposed of. One of the ways is reuse, by which the computer is sold or donated to the next user, as it no longer fulfills the requirements of the customers. One of the other methods is formal disposal, by which the laptop or desktop is disassembled and destroyed to recover the parts and materials. Metals recycling technology is useful, as developed facilities can recover steel, aluminum, copper, nickel, lead, zinc, silver, platinum, gold, and other highly precious metals and non-metals from computer waste [6].

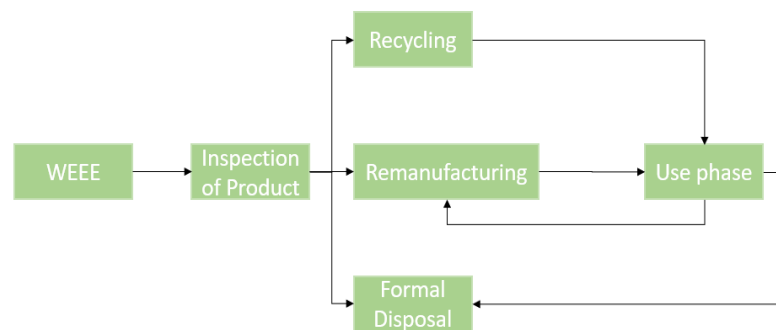

**Figure 2.** Different methods of electronic waste management.

The next method of treatment for the waste electronics is remanufacturing, in which specific components of the computer are replaced with newer versions of the respective parts to increase the total efficiency of the computer. Often, the user discards the laptop or desktop due to dissatisfaction with the laptop when running on original software [6]. A typical up-gradation of a laptop or desktop PC would involve replacing microprocessors, hard-drive, operating software, random access memory (RAM), and graphics card. Remanufacturing is one of the more preferred end-of-life options for a desktop or laptop computer from an environmental standpoint [6]. Much of the energy is invested during the manufacturing phase of the laptop; hence, the ecological payback of recycling materials is low compared to that of remanufacturing [6].

Green technology is gaining crucial importance to maximize awareness of computing's environmental influence. Due to rising energy consumption, global warming, and e-waste, governments and public companies have factored the notion of Green Computing into the equation as a contribution to good practices for environmental sustainability [7]. The concept of Green Computing refers to the accountable and resourceful production, usage, and disposal of computing devices while sustaining financial feasibility and improving performance in a green manner [8]. Piotr Pazowski [8] defines the fundamental approaches in green technology by using four concepts: Green Use, Green Disposal, Green Design, and Green Manufacturing. Green Use refers to the use phase of the electronic, focusing on reducing the power consumption of electronics. Green Disposal refers to a greener method of disposal where the original equipment manufacturers (OEMs) can obtain the used product based on a return policy to avoid any damage to the environment. This method focuses on the refurbishment and reuse of existing computers and other electronic devices. The process of green disposal provides an opportunity for the IT vendors for a "take-back" policy to ensure the full life cycle of a given product. Green Design refers to the designing of power-efficient and eco-friendly products that consume less power

and can produce the same output on the given power supply. The design process involves connecting companies, government bodies, and environmental organizations for the development of inventive techniques and businesses for designing computer models that can improve environmental quality and enhances economic growth. Finally, Green Manufacturing focuses on the use of a greener method of manufacturing with reduced waste and the use of recycled materials to produce computers and laptops. This approach generates income, such as long-term cost savings, and generates developments to the efficiency of the business processes.

Ayres [9] conducted a case study based on the life cycle assessment (LCA) technique. The author concluded that LCA is one of the most important decision-making tools for an organization. The LCA provides the opportunity to assess the total environmental footprint for a given product accurately. Apart from the multiple benefits put forward by the methodology, it faces dire challenges. LCA does not give a detailed report; instead, it acts as a compass to direct the decision of an organization. Many LCA cases may show merely trade-offs. It can only occasionally point confidently towards the “best” technological preference. However, the author also points out that there are more challenges in front of an LCA. One of the aspects of this problem is non-comparable units of measurement for emissions and results. This gives rise to an ambiguity in the validation of the result for assessing the given product. The second aspect of the problems with data deficiency is its universal reliance on either open-source theoretical process data (such as chemical engineering, publications, or literature on patents). Some of those “data” are physically impossible. Also, different authors analyzing the same rather standard product commonly differ by orders of magnitude regarding specifics.

The rapid proliferation of new technology products means low reusability of EEE components for the next product generation, and more open-loop materials (materials that can be recycled into other items) available for recycling. Reuse or remanufacturing levels and more open-loop recycling will eventually affect the energy efficiency of the multi-generation product system, as closed-loop recycling such as remanufacturing or reuse is often seen as the higher level in the waste management hierarchy. The traditional LCA process, however, cannot fully assess such a dynamic impact. The standard LCA focuses on one product or one generation of a given product with a static view. While the recycled materials and components are usually included in the conventional LCA, there is still no room for their reuse or reuse processes in the new products or any industrial application [1]. LCA does not specifically cover the economic or social aspects of the product. However, the approach to the life cycle and methodologies discussed in the International Standard is applied to these other aspects [10]. Fatimah and Biswas use a framework that can be applied in determining remanufacturing strategies to achieve sustainability of remanufactured computers [11]. To assess the sustainability of the remanufactured computers, they followed a framework introduced by Fatimah et al. [12]. Firstly, the authors assessed the current sustainability of the situation through direct observation from economic, social, and environmental standpoints. The result is then compared with threshold values of sustainable manufacturing criteria extracted from national and international values. The authors further discuss several options for improving these numbers to elevate the sustainability of remanufacturing of computers to propose strategies and policies. The authors compared three scenarios to find the most sustainable option. Fitzpatrick et al. described the life cycle engineering of an integrated computer system from the perspective of a small-to-medium enterprise (SME) [13]. The authors assess the different decision points for an integrated computer system from an SME perspective to help increase the possibility of a more environmentally positive outcome. The authors discussed the features of the iameco-integrated PC, which is categorized under the Energy Star 5.0 specification. However, the authors concluded that an SME is incapable of engineering the life cycle of a computer to produce positive environmental outcomes. Although with careful design considerations, it is possible to provide an incentive for the stakeholders to encourage them towards the environmentally preferred option [13].

In this paper, the problems related to the remanufacturing of the products in group 3 (electricals and electronics) is dealt with. Such products have a fast evolution speed and a short lifetime. These are distinguished, based on their characteristics, into two types: M-PLC Products by Design Innovation and M-PLC Products by Technology Innovation. The former aim to enhance value by not only providing satisfactory design functionality of their life cycle, but also by providing appropriate EOL treatments and an extension of their life cycle (e.g., photocopying machines). On the other hand, the latter refers to new products with upgrades that are produced to perform the same essential functions as the older models. Usually, a new generation of products can increase the value by offering a more satisfying performance with updated technology (e.g., mobile phones, laptops, and graphic cards).

Using the different methods and results found in the literature, for this paper, an integrated model of DES and LCA is used to study and compare the environmental impact of a centralized and decentralized remanufacturing network. Sections 3–5 provide the methodology used to achieve the aim of the paper. Section 6 consists of a detailed discussion of the results of the assessment and the comparison between the two networks. Lastly, Sections 7 and 8 consist of concluding remarks and the gaps in the research, along with possible future research on determining the total environmental footprint of computers.

## 2. Environmental Impact of Remanufacturing


The generation of waste consumer electronics poses grave problems for the environment, such as increases in the landfills due to consumer electronic waste, which can result in increased toxin generation, and which can have a serious detrimental effect on the humans. The computer consumes a lot of energy in its various phases during its life cycle. life cycle assessment, as the name suggests, is a simple approach for evaluating all of a product's (or service's) environmental impacts, from "cradle to grave" [14]. The estimation of the total energy consumed during the production, use, and remanufacturing phase of laptop computers is measured using the LCA methodology. In this paper, the various energies involved with the remanufacturing of a computer in a centralized, as well as a decentralized, remanufacturing scenario are tracked. The two scenarios are assessed using the LCA methodology based on an integration with discrete event simulation (DES).

Table 1 depicts the bill of materials for a laptop, along with the total weight of the material used. The material bill reflects an average of the best-selling laptop computers fitted with a 15-inch LCD screen in 2005. According to data derived from the IVF Industrial Research and Development Corporation survey in 2006, the average physical weight of a laptop computer is 2.9 kg, with a lifetime of 5–6 years [15]. Electrical and electronic equipment, such as laptops, has a significant environmental impact during its various stages of manufacturing, use, remanufacturing, and disposal [16]. The energy consumed during the manufacturing of a laptop will remain the same for a particular type of product; however, the energy consumed during its use phase depends on whether the product is being used for office or home purposes [14]. Figure 3 below shows the energy consumption during the stages of manufacturing, use, and remanufacturing. The data is adapted from [11,13]).

**Table 1.** Inventory of materials for laptops [15].

S. No.	Material/Component	Weight in Grams
1	Low-Density Polyethylene (LOPE)	43
2	Polypropylene (PP)	4
3	Polystyrene (PS)	3
4	Expanded Polystyrene (EPS)	50
5	Polyvinyl Chloride (PVC)	23
6	Acrylonitrile Butadine Styrene (ABS)	142

7	Polyamide 6 (PA6)	281
8	Polycarbonate (PC)	267
9	Polymethylmethacrylate (PMMA)	36
10	Epoxy	3
11	Steel Sheet Galvanized	489
12	Aluminium Sheet/Extrusion	38
13	Copper Wire	60
14	Copper Tube/Sheet	15
15	Magnesium–Zinc Sulphide (Mg–ZnS) cast	122
16	Powder Coating	63
17	LCD Screen	501
18	Big Caps and Coils	133
19	Slots/External Ports	47
20	Integrated Circuits (5% SI, Au)	31
21	LEDs Average	50
22	PWB, 1/2 LAY (3.75 KG/M <sup>2</sup> )	5
23	PWB, 6 LAY (4.5 KG/M <sup>2</sup> )	77
24	SOLDER SnAg <sub>4</sub> Cu <sub>0.5</sub>	7
25	Glass for Lamps	1
26	Cardboard	921

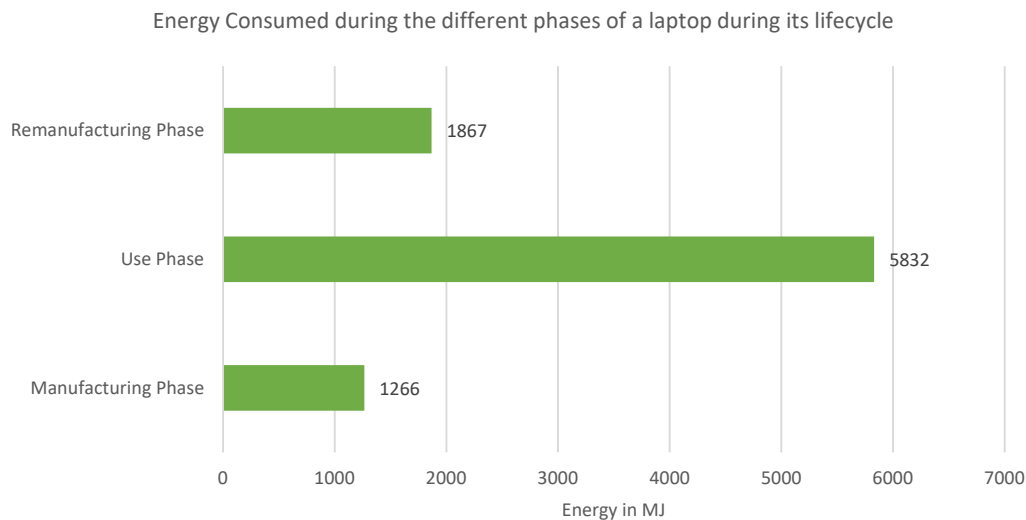

**Figure 3.** Total energy consumption of a laptop computer over its three stages.


During the manufacturing phase of a laptop, 1266 MJ of energy is consumed in transforming heavy-duty metals into the desired product (manufacturing phase), and 5832 MJ of energy is consumed in the form of electricity for an office laptop (use phase). In contrast, a home computer consumes 3627 MJ of energy. In the remanufacturing phase of the laptops, 1867 MJ of energy is consumed for the repair and upgrade of the system (remanufacturing phase) [6].

### 3. Centralized and Decentralized Remanufacturing Scenario

Two respective remanufacturing cases for the assessment are carried out. The two scenarios are assessed for their respective environmental impact to suggest which remanufacturing operation would be better suitable per sustainability metrics and its overall impact on its surroundings.

### 3.1. Centralized Remanufacturing Scenario

In the centralized scenario, the remanufacturing center is based in the Middle East due to its central geographical location that facilitates the transport of the discarded laptops from different pickup locations located on each continent. The laptops are transported to pickup locations from different sources or bought from customers via trucks. The laptops are then transported to the nearest port in a container to be transported to the Middle East for remanufacturing. This shipment of laptops is transported from the Middle East via ships. The laptops are then transported to the remanufacturing center located in the Middle East via trucks. The remanufacturing process is shown in Figure 4.

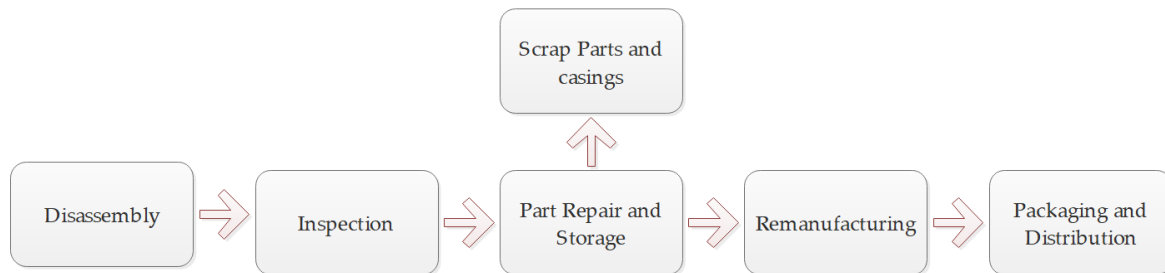

**Figure 4.** Remanufacturing process of laptops.

The initial step in the remanufacturing process is the disassembly of the laptops. As the laptops arrive in the remanufacturing center, each laptop is disassembled irrespective of the type, model, or generation.

The next step is inspection, during which each part is inspected to evaluate its health state. In this step, the parts still in their prime condition are stored to reuse for the remanufacturing of laptop computers. On the other hand, parts that are damaged but can be salvaged through repair are repaired to increase the efficiency of the given parts, whereas the parts that cannot be salvaged are pushed to scrap. It is assumed that the weight of the total waste generated is 30% of the weight of the laptops shipped to the remanufacturing center.

The remanufacturing step in operation involves replacing the damaged parts in a laptop casing with parts in a better condition to regain the efficiency of a new laptop and be reliable enough to offer a warranty of 1–2 years. The remanufactured laptops are then packaged in cardboard boxes and transported to the pickup locations to be sold in their respective markets. To tackle the inefficiencies and the environmental flaws of the aforementioned remanufacturing strategy, this work suggests a management strategy to have a remanufacturing center in each of these pickup locations.

### 3.2. Decentralized Remanufacturing Scenario

The decentralized remanufacturing scenario involves the procurement of parts (discarded laptops) from various sources or directly from the customers. However, unlike the above-mentioned supply chain model, these parts are not transported to a remanufacturing center located in the Middle East. These parts are sent to a remanufacturing plant situated near these pickup locations. Laptops are remanufactured in each pickup location using the same remanufacturing process as the centralized network and distributed to be sold in different markets located over the globe. In the next sections of the paper, a full LCA of both cases to evaluate their total impact on the ecosystem is conducted.

## 4. Life Cycle Assessment

The assessment was conducted using the openLCA software for the life cycle assessment of the supply chain models integrated, along with WITNESS Horizon from Lanner Group for discrete event simulation (DES). The LCA was carried out based on the LCA framework provided in ISO 14040:2006 as a skeleton. The ISO framework acts as a guide for all general LCA [10]. For this assessment, DES has been integrated along with LCA, and a suitable framework is created. The framework helps in understanding the different steps included in the assessment. The assessment begins with establishing a scope for the required assessment; the next steps include populating the life cycle inventory and then conducting a discrete event simulation and assessment. The final step is to interpret the result of the assessment.

The DES of manufacturing systems is a proven method for planning and evaluating the efficiency and effectiveness of manufacturing systems. DES has proven its usefulness in job-order-related and time-sensitive planning of output flows [17]. It has proven to be a very successful solution to troubleshoot and optimize output processes [18]. Material Flow Analysis (MFA) implemented to a company's manufacturing framework typically focuses on increasing the performance of the production processes, i.e., in such a way that the most effective use of materials and resources is achieved [19]. Integrated the application of DES and MFA in the manufacturing systems context adds to the usually-static MFA a dynamic, job-order related perspective [17].

One of the goals most discussed in DES is the optimization of benefits, i.e., determining which of the alternative solutions is the most effective over time. In the past, the emphasis has been on profitability. However, environmental issues are becoming more critical, and if people want to make use of natural resources, they need more focus. DES and LCA are a powerful combination for assessing the cause and effect of different circumstances in which time, energy, location, and random input variables affect sustainable production design [18].

### 4.1. Integration of DES with LCA

The application of DES has become increasingly common and significant in the last decade in the sustainability analysis of production systems [20]. For this study, a model of the entire network was created using DES. In the evaluation and development of any production system, the combination of DES and life cycle assessment (LCA) data and analysis techniques have been developed and evaluated. This combined approach (DES and LCA) has also been assessed in recent research regarding its feasibility for environmental goods assessment.

Andersson, Skoogh, and Johansson [21] discussed three projects which aim at the successful integration of LCA with DES. The authors compare the three integration projects and talk about the different scopes, applications, and challenges faced by these integration projects.


Another big project in the integration of LCA with DES is the Milan/Eco factory, which aims to combine DES with MFA and LCA [17]. This reimplementation aimed to compose the simulation software of several independently developed parts, such as the



simulation service, the components of the simulation, the persistence backend, and the graphical user interface. With this structure, the current simulation components are augmented with new functionality (such as the accounting of materials during a simulation run), and brand-new simulation components are added.

#### 4.2. Scope and Boundary

To achieve the goal of the paper and to gain a detailed knowledge of the ecological footprint of the supply chains, an integrated model of LCA and DES is used. The boundaries for the centralized and decentralized remanufacturing networks for the LCA are shown in Figure 5a,b. The boundaries were drawn to facilitate consistent and functionally equivalent comparisons between the two supply chains.

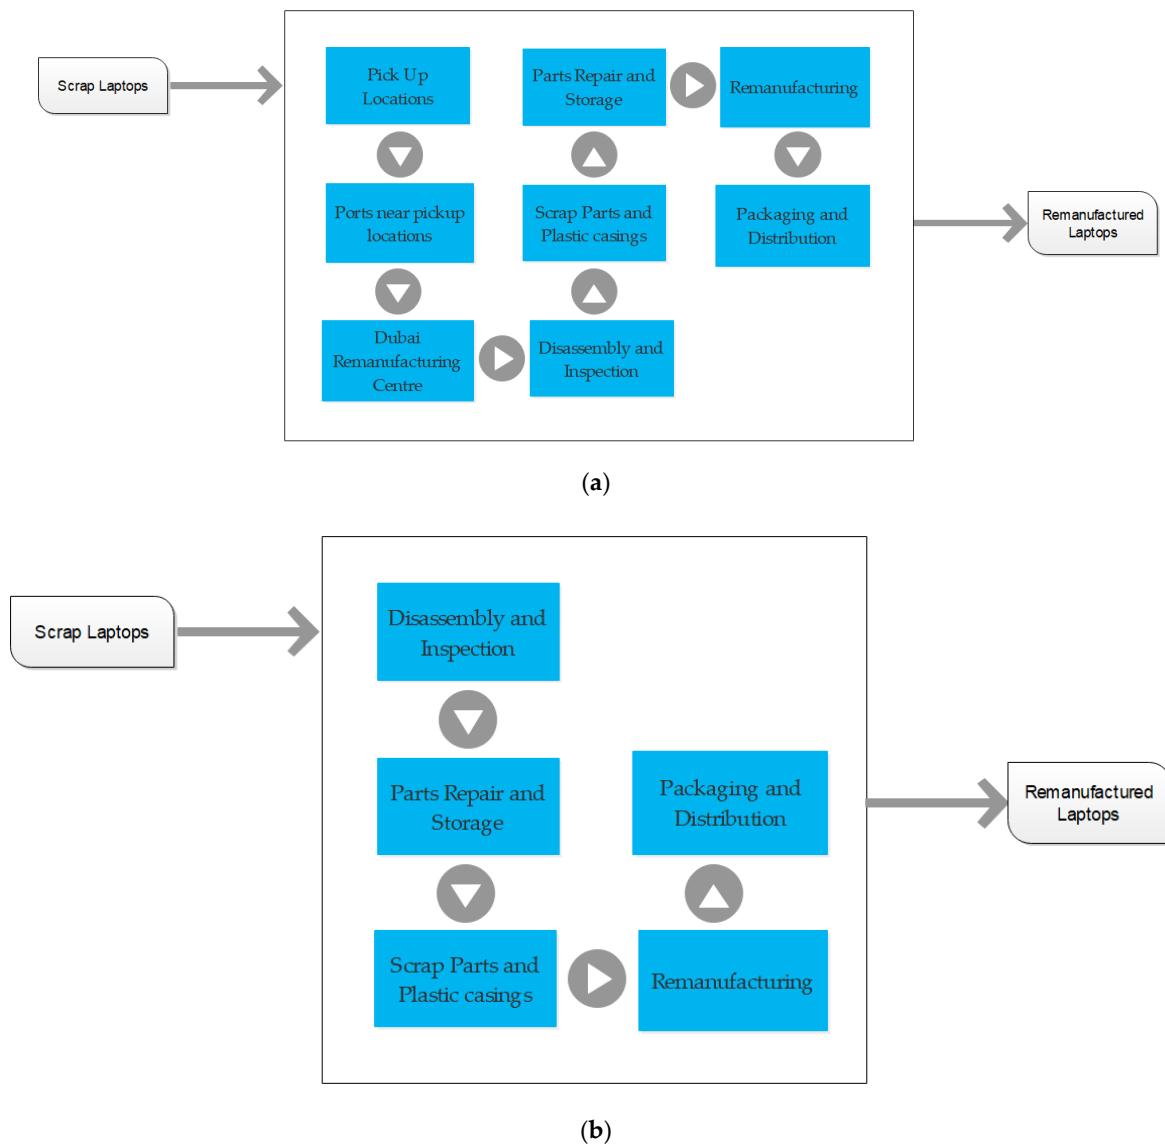

**Figure 5.** Boundary of (a) centralized remanufacturing; (b) decentralized remanufacturing.

#### 4.3. Life Cycle Inventory

Life cycle inventory refers to collecting data on the total inputs and outputs of the system. All the data used in the life cycle inventory have been extracted from past

literature. In this project, three processes have an environmental impact transported via truck, ship, and the complete process of remanufacturing inside the remanufacturing plant.

#### 4.3.1. Life Cycle Inventory Data for Remanufacturing

The inputs for the life cycle inventory for the remanufacturing process are taken to be the bill of materials for a laptop (refer to Table 1). Apart from the several metallic and non-metallic materials that are used in the process of remanufacturing, a few more resources are required to complete the remanufacturing process. These inputs have been listed in Table 2. The values are derived from the report from Swerea IVF Industrial Research and Development Corporation, Sweden, based on the environmental impact of the manufacturing, use, and disposal of personal desktop computers and laptops [15].

**Table 2.** List of inputs for remanufacturing [15].

S. No.	Inputs	Unit	Total Amount
1.	Energy in the form of electricity	MJ	1867
2.	Water (Process)	Liter	632
3.	Water (Cooling)	Liter	290

The outputs listed in Table 3 are used in the LCI for the LCA of the remanufacturing process.

**Table 3.** List of remanufacturing outputs for LCA.

S. No.	Emissions	Unit	Value
1.	Cardboard waste	g	276.3
2.	Chemical waste	g	155
3.	Copper waste	g	22.5
4.	Electronic waste	g	400
5.	Polyethylene waste	g	12.9
6.	Polystyrene waste	g	0.9
7.	Polyvinyl chloride waste	g	6.9
8.	Steel waste	g	146.7
9.	Tin waste	g	16.794
10.	Waste, rubber	g	230
11.	Carbon dioxide	g	270,000
12.	Carbon monoxide	g	40.662
13.	Sulphur Dioxide	g	16.7433
14.	Particulate matter	g	47.838
15.	Nitrogen oxides	g	0.11959

The quantities of waste produced have been assumed to be 30% of the total weight of laptops brought into the remanufacturing facility. The total amount of waste and emissions produced are extracted from literature, or the values have been assumed.

#### 4.3.2. Life Cycle Inventory Data for Transportation

The transportation of laptops has a significant impact on the environment. These laptops are transported from the pickup locations to the port and then shipped to the Middle East for remanufacturing for the centralized remanufacturing scenario. In this case, we must evaluate the total emissions produced during the transit of laptops from one continent to another. For the evaluation of emissions, values have been extracted from previous literature, and aspects of the transportation process have been assumed. For the assessment, we have assumed that the ship and the truck move at a constant speed, maintaining

a constant fuel average. We have assumed that the fuel consumption average provided by the ship is 55.2 L of ship fuel per 100 km.

Similarly, the average fuel consumption for the trucks is assumed to be 28.6 L per 100 km. The LCI data have been calculated using assumptions and values for the emission per kilogram of fuel, and have been extracted from previous literature. Tables 4 and 5 list the total emissions produced by 1 kg of fuel for trucks and ships, respectively. Values taken for emissions from a ship for 1 kg of fuel are assumed for a load of 85–90 percent.

**Table 4.** Total emissions generated for 1 L of fuel for trucks.


S. No.	Emissions	Unit	Amount
1.	Carbon Monoxide	g/kg	2
2.	Hydrocarbons	g/kg	50
3.	Nitrogen Oxides	g/kg	1.7
4.	Particulate Matter	g/kg	0.16
5.	Carbon Dioxide	g/kg	3180
6.	Sulphur Dioxide	g/kg	0.7

**Table 5.** Total amount of emissions generated for 1 L of ship fuel [22].


S. No.	Emissions	Unit	Amount
1.	Carbon Monoxide	g/kg	15.84
2.	Hydrocarbons	g/kg	1.3728
3.	Nitrogen Oxides	g/kg	4.224
4.	Particulate Matter	g/kg	0.1056
5.	Carbon Dioxide	g/kg	28.3008

**5. Discrete Event Simulation of the Centralized and Decentralized Remanufacturing**

The simulation model is created on WITNESS Horizon software from Lanner Group that maps out the entire network for the centralized and decentralized remanufacturing of computers. The simulation models for the centralized and the decentralized remanufacturing network are shown in Figure 6a,b, respectively. The laptops are taken from the port of the Middle East to the remanufacturing center, where each type of laptop undergoes a standardized process. The process starts with disassembly, during which the laptops are stripped down to their parts and moved on to the next step, inspection. In this step, the current condition of the part is mapped. The parts in good condition are pushed to the storage, and the parts that require repair are pushed for repair. The parts that cannot be used are discarded as scrap.

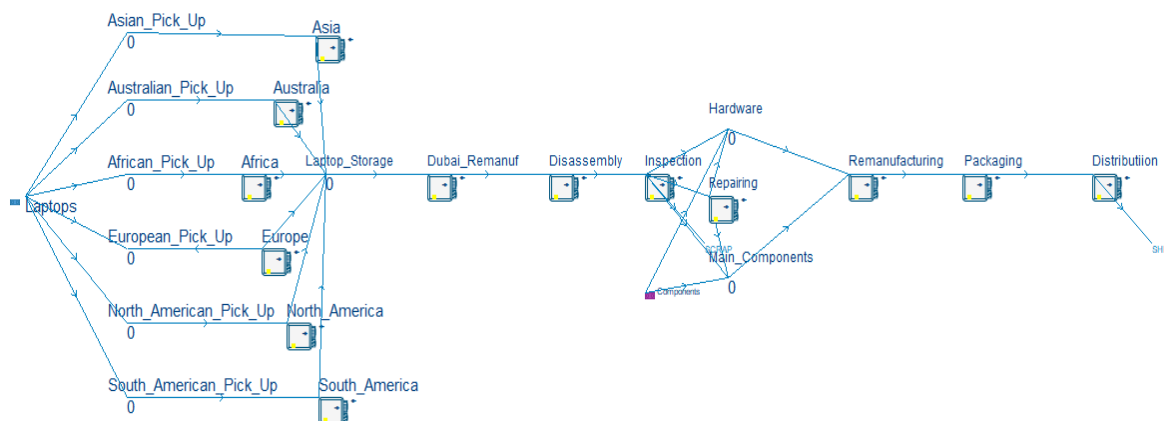

(a)

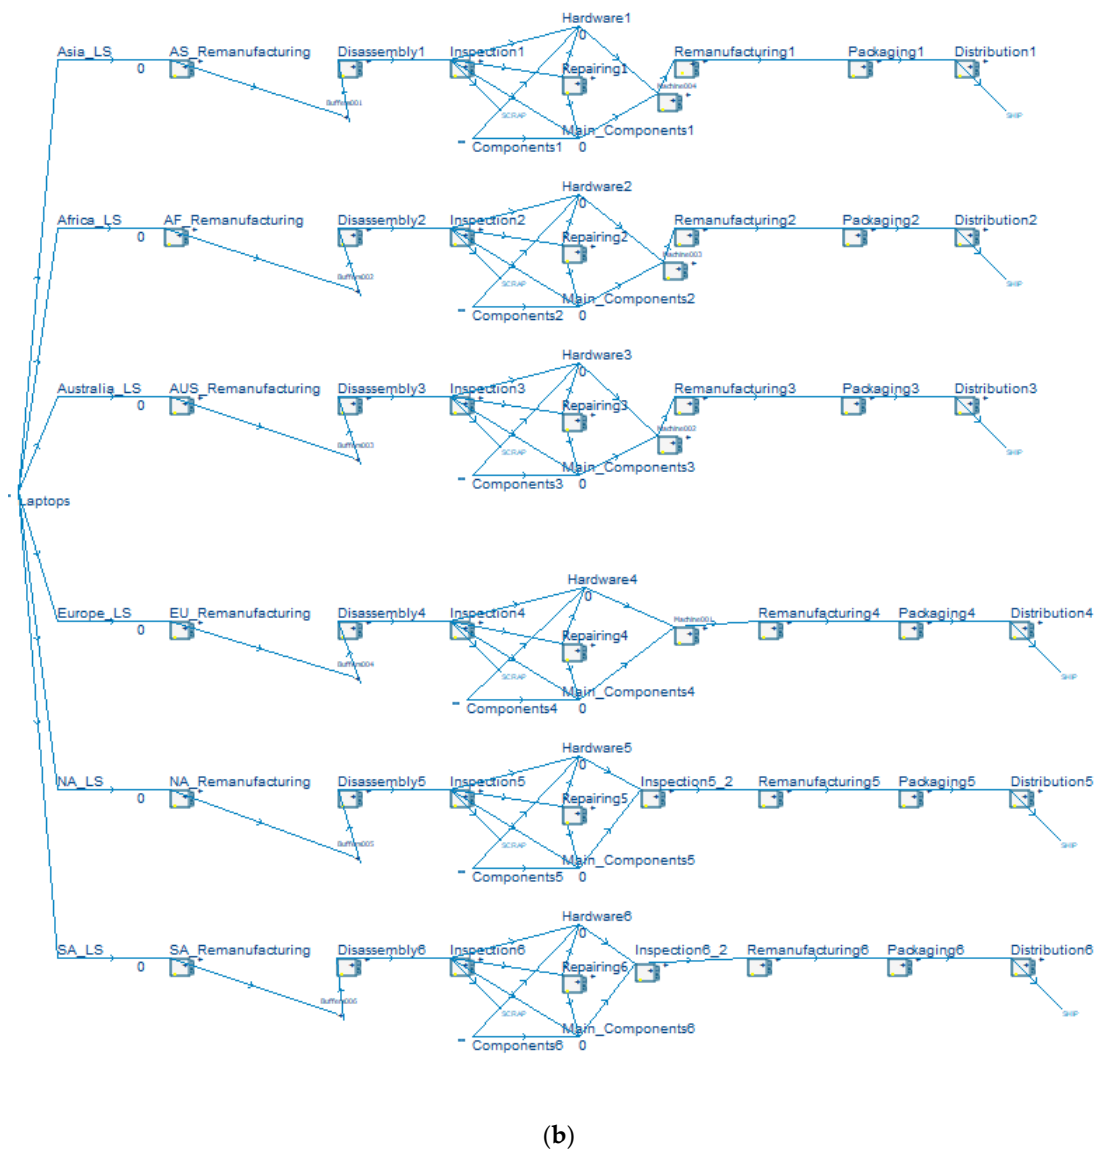

**Figure 6.** Simulation model in WITNESS Horizon for (a) centralized remanufacturing network; (b) decentralized remanufacturing network.

The laptops are forwarded to remanufacturing step, in which each laptop is assembled with upgraded parts and peripherals. These remanufactured laptops are packaged and then shipped for sale.

The process of DES provides the opportunity of studying a given process and evaluating its efficiency, to get a closer and detailed view of the process. The simulation model has been constructed based on a few assumptions which are listed as follows:

1. The total weight for the container that is shipped from the pickup location is assumed to be 750 kg (functional unit). The average weight of a laptop is assumed to be 2.9 kg. As a result, a total of 250 laptops are assumed to be shipped in a single shipment.
2. The laptops are shipped from the pickup locations every ten days.
3. The total distance between the port and the pickup location is assumed based on the probable prime geographical locations of pickup centers that are located all over the globe.
4. The total distance between these pickup locations and the Middle East port is assumed based on the locations of the pickup locations.

5. The cycle times for every process in the remanufacturing of a laptop are assumed.
6. A 9-hour shift for the day is assumed with being off on weekends.

For this assessment, DES is used to recreate a real-life supply chain scenario for both cases. Through DES, the total throughput and the utilization of each labor instance and machine are evaluated. This data assist in calculating the total emissions produced during the process of remanufacturing. As a result, the energy inputs in the life cycle inventory are much more accurate. They measure the emission rates, the weight of the raw materials, and the overall energy consumption during the remanufacturing process using the data derived from the simulation, and comparing them with the data in the life cycle inventory.

The calculated values extracted with the help of DES are used to assess the total environmental impact of the two supply chain models. For the assessment, the ReCiPe method of assessment is used. The ReCiPe is a life cycle impact assessment (LCIA) process, first established in 2008 through collaboration between RIVM, Nijmegen University of Radboud, University of Leiden, and Pré Sustainability [23]. ReCiPe is used for the environmental analysis of products when a higher consistency in midpoint and endpoint method application is needed, since it was created as an updated version of CML 2 and Eco-indicator 99 [24]. The key objective of the ReCiPe method is to transform the long list of life cycle inventory results into a limited number of indicator scores (such as “Damage to human health”, “Damage to ecosystems” and “Damage to resource availability”). These indicator scores express the relative severity of an environmental impact category. In ReCiPe, indicators are determined at two levels [23]:

- a. At 18 midpoint indicators.
- b. Three endpoint indicators.

The assessment is carried out for different cases and different scenarios for six different laptops. The scenarios taken into consideration for this are as follows:

- a. Assessment for a single laptop that arrives from different pickup locations located around the globe to a remanufacturing center in the Middle East for the centralized remanufacturing scenario;
- b. The assessment of a laptop that is remanufactured in the remanufacturing plants located in each continent.


Based on the assumptions mentioned in the earlier sections. the following assessment of the remanufacturing operations for the variety of laptops for one month.

## 6. Results

The inventory data were input using Tables 2–5. The software analyzes the given input values for the resources used and the emissions generated to calculate the values for the mid-point categories. The values of the midpoint categories for each scenario of the assessments have been compiled in Table 6. The values of the midpoint categories from the LCA are compared to get a detailed understanding of the impact of the two supply chains to aid in decision making. In centralized remanufacturing, the values for each midpoint category are comparatively much higher than those of decentralized remanufacturing. This means that the present supply chain scenario’s overall environmental effect is greater than the environmental impact of the alternative supply chain. The results of the assessment of the supply chain network when the network is operated for one month as bar graphs are shown in Figure 7a,b.

**Table 6.** LCA results of remanufacturing operation over one month.

Midpoint Category	Unit	Result: Centralized Remanufacturing	Result: Decentralized Remanufacturing
Climate change	kg CO <sub>2</sub> -Eq	1035.189882	816.12
Marine eutrophication	kg N-Eq	0.21805935	0.27912306
Particulate matter formation	kg PM10-Eq	24.10754257	20.2498188
Photochemical oxidant formation	kg NMVOC	10.58718537	8.862929189
Terrestrial acidification	kg SO <sub>2</sub> -Eq	120.6422475	100.8616224

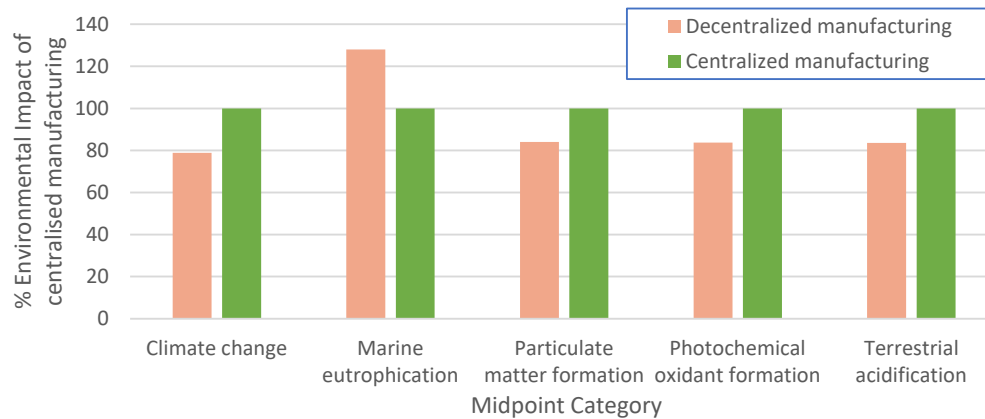**Figure 7.** Total environmental impact of decentralized manufacturing compared to the centralized manufacturing impact (centralized manufacturing environmental impact considered as the benchmark at 100%).

The supply chain networks are assessed for two scenarios as mentioned above, in the result obtained for the life cycle assessment of the centralized and decentralized remanufacturing. In the first scenario, in which the LCA results of the two supply chain scenarios over a month are compared, there is a significant difference in the different fields of impact. The impact is calculated using equivalent units for a given category. The centralized remanufacturing scenario has a climate change impact of 1035.19 kg of CO<sub>2</sub>-Eq, as compared to the decentralized remanufacturing scenario with an impact of 816.12 kg of CO<sub>2</sub>-Eq. The decentralized remanufacturing was found to have a lower impact in terms of impact on human health, the impact on the ecosystem, and the impact on the resources. The decentralized remanufacturing network has a higher impact on marine life, with a quantified value of 0.28 kg of N-Eq, as compared to the impact on the marine life of the centralized remanufacturing (0.22 kg of N-Eq).

The centralized remanufacturing network poses a threat to human health and ecological life. The network had a greater environmental impact when viewed from a God's eye view. However, in the second scenario, the results are seen for the environmental impact of remanufacturing a single laptop which is dispatched from different pickup locations. It is assumed that the same laptop model is used for all the assessments; the results are tabulated in Table 7. In the table, the five midpoint categories with the highest impact are presented.

**Table 7.** Result of LCA for a single laptop in both supply chains.


Pickup Location	Midpoint Category	Unit	Result: Centralized Remanufacturing	Result: Decentralized Remanufacturing
Asian	climate change	kg CO <sub>2</sub> -Eq	2,807,273.297	133.9701319
	marine eutrophication	kg N-Eq	584.0683781	8.057388925
	particulate matter formation	kg PM10-Eq	615.2505112	25.14872661
	photochemical oxidant formation	kg NMVOC	1559.710832	28.85847126
	terrestrial acidification	kg SO <sub>2</sub> -Eq	1559.231272	112.059126
African	climate change	kg CO <sub>2</sub> -Eq	5,406,600.91	267.9402637
	marine eutrophication	kg N-Eq	1124.614086	15.83565479
	particulate matter formation	kg PM10-Eq	1035.393402	30.04763441
	photochemical oxidant formation	kg NMVOC	2995.681382	48.85401333
	terrestrial acidification	kg SO <sub>2</sub> -Eq	2909.573793	123.2566295
Australian	climate change	kg CO <sub>2</sub> -Eq	7,981,979.834	334.9253297
	marine eutrophication	kg N-Eq	1660.179521	19.72478772
	particulate matter formation	kg PM10-Eq	5326.924486	32.49708832
	photochemical oxidant formation	kg NMVOC	4418.421736	58.85178436
	terrestrial acidification	kg SO <sub>2</sub> -Eq	4247.475046	128.8553813
European	climate change	kg CO <sub>2</sub> -Eq	7,046,112.414	5645.048276
	marine eutrophication	kg N-Eq	1465.560299	1.453044577
	particulate matter formation	kg PM10-Eq	1513.671129	21.19776087
	photochemical oxidant formation	kg NMVOC	3901.411857	11.88072229
	terrestrial acidification	kg SO <sub>2</sub> -Eq	3761.294864	102.5515865
North American	climate change	kg CO <sub>2</sub> -Eq	9,826,792.138	66.98482759
	marine eutrophication	kg N-Eq	2043.819262	4.168255992
	particulate matter formation	kg PM10-Eq	2103.035322	22.6994263
	photochemical oxidant formation	kg NMVOC	5437.568428	18.86070022
	terrestrial acidification	kg SO <sub>2</sub> -Eq	5205.849236	106.4603742
South American	climate change	kg CO <sub>2</sub> -Eq	9,481,115.172	167.4626648
	marine eutrophication	kg N-Eq	1971.933671	10.00195539
	particulate matter formation	kg PM10-Eq	2029.769198	26.37345356
	photochemical oxidant formation	kg NMVOC	5246.602911	33.85735678
	terrestrial acidification	kg SO <sub>2</sub> -Eq	5026.27114	114.8585018

The results are compared for both the supply chain models. The results of Table 7 show the impact caused by the respective supply chain network for the midpoint categories discussed above. The decentralized remanufacturing had a lower impact than centralized remanufacturing for each of the categories. Figure 8 shows the environmental impact of the decentralized manufacturing supply chain network as a percentage of a given impact for the centralized manufacturing for a given pickup location.


In the first case, the laptop is dispatched from an Asian pickup center and goes through the process of remanufacturing. The impact of the laptop from an Asian pickup center is assessed for both centralized and decentralized remanufacturing. The results show that the decentralized remanufacturing network had a very low impact on the environment, as compared to the centralized remanufacturing network.

Apart from having a lower environmental impact than the centralized remanufacturing network, the decentralized remanufacturing network is more efficient. The decentralized remanufacturing network had a total throughput of 2311 remanufactured laptops from six remanufacturing plants, whereas the centralized remanufacturing network had a throughput of 1085 remanufactured laptops. Figure 9 shows a bar graph depicting the total throughput of the two remanufacturing cases. A total lot size of 3000 laptops is dispatched over a month. The simulation is designed to mimic the real-life supply chain network, to precisely assess the total environmental impact; as a result, the laptops are assumed to be dispatched in two lots of 1500 laptops. In the centralized remanufacturing network, the two lots of laptops are sent to the remanufacturing plant located in the

Middle East, whereas the decentralized remanufacturing network receives these laptops in all remanufacturing facilities located near the pickup locations. The Middle East remanufacturing plant has higher utilization than the utilization of each plant in the decentralized network. This implies that the decentralized network has much more room, which allows the organization to increase the total amount of discarded laptops that are received and increase the throughput of each of these plants.

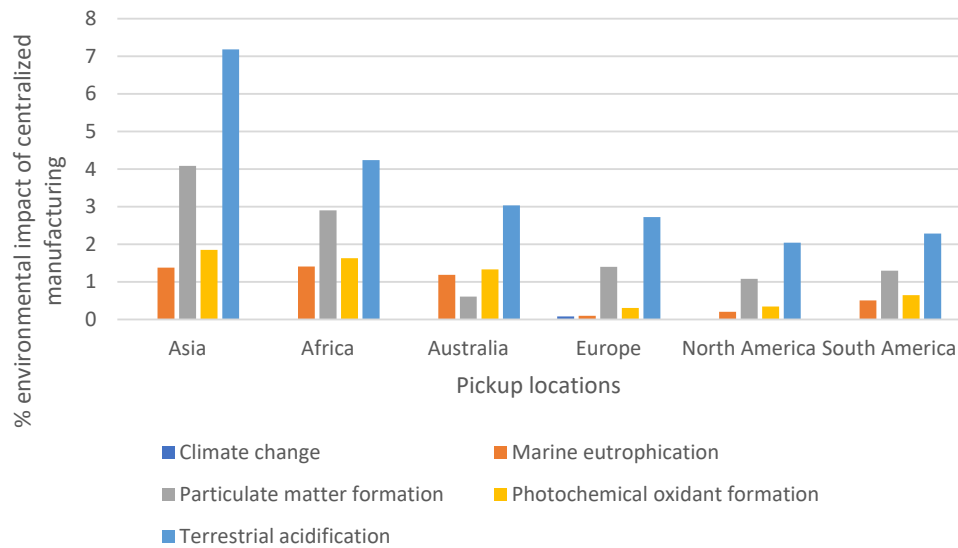

**Figure 8.** Comparison of environmental impact sourced from each continent for decentralized manufacturing.

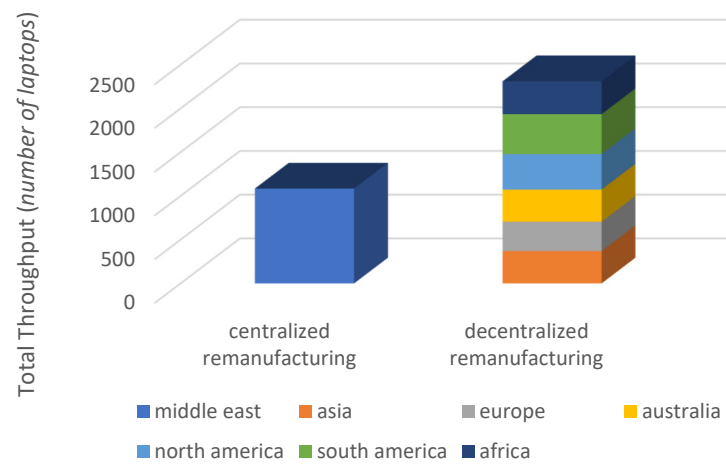

**Figure 9.** Total throughput of centralized and decentralized remanufacturing.

### 7. Conclusions

The issue of WEEE has been vastly growing over the years. Remanufacturing of consumer electronics has proven to be an important breakthrough towards sustainable manufacturing. However, several issues still entail with remanufacturing. The goal of the study was to study and compare the impact of two remanufacturing networks on the environment. The results show that a decentralized remanufacturing network shows less impact on the environment than a centralized network. A life cycle assessment was conducted for both the scenarios of centralized and decentralized remanufacturing. The



decentralized remanufacturing network gives a competitive edge compared to the centralized remanufacturing network. In scenario one, there is a big difference in the environmental impact for each assessment between the two supply chains. The decentralized remanufacturing network has a lower environmental impact and a better throughput than the centralized remanufacturing network. The total utilization of the Middle East plant is higher than the plants in the decentralized remanufacturing network. This shows that for the given lot size, the decentralized remanufacturing network provides more room for input as discarded laptops. As the scrap laptops are not transported from various pickup locations, it gives more room for the Material Resource Planning to bring in more scrap laptops and, as a result, reduces the scrap parts and moves towards a much leaner production. The decentralized scenario helps in reducing the transportation waste and raw material waste, and develops a scenario in which the organization can expand its operations. From an economical and strategic point of view, the organization will be saving time and resources by removing the transport of laptops by ship, and this gives room to predict the total amount of raw material to be received. Due to the absence of transportation via sea and the addition of remanufacturing plants in each continent, laptops arrive at remanufacturing plants at a much higher frequency and a much bigger lot size.

Thus, the decentralized remanufacturing network is much more beneficial than the centralized network for sustainability. It provides the opportunity to gain an environmental, economic, and strategic edge over its competitors.

## 8. Future Research

The literature evaluates the total environmental impact of the remanufacturing operation. One of the scopes for research is the LCA of the remanufacturing supply chain network. This work attempts to evaluate the environmental impact of the supply chain network of a remanufacturing operation. For energy analysis of a remanufacturing operation, energy is utilized, and the emissions generated during the manufacturing and the use phase of the previous life of a laptop are excluded from the scope. Another scope of research is multi life cycle assessment. MLCA is a process that provides a method to assess the environmental impact of a remanufacturing operation with much more accuracy. One of the other scopes for research is the integration of DES with LCA. As discussed in the earlier sections, the integrated model of LCA and DES provides a highly detailed view of the system and helps the user evaluate precise amounts of inputs and outputs for the LCI data. There are very few papers based on the applications of this integrated model on remanufacturing operations.

**Author Contributions:** Conceptualization, P.S. and K.S.; methodology, P.S. and K.S.; validation, A.M. and P.S.; formal analysis, A.M., M.A., O.O. and P.S.; resources, K.S.; writing—original draft preparation, P.S. and A.M.; writing—review and editing, all; supervision, P.S. and K.S. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research received no external funding.

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** Data are contained within the article.

**Conflicts of Interest:** The authors declare no conflict of interest.

## References

1. Lu, B.; Liu, J.; Yang, J.; Li, B. The environmental impact of technology innovation on WEEE management by Multi-Life Cycle Assessment. *J. Clean. Prod.* **2015**, *89*, 148–158. <https://doi.org/10.1016/j.jclepro.2014.11.004>.
2. Amato, A.; Rocchetti, L.; Beolchini, F. Environmental impact assessment of different end-of-life LCD management strategies. *Waste Manag.* **2017**, *59*, 432–441. <https://doi.org/10.1016/j.wasman.2016.09.024>.
3. Forti, V.; Baldé, C.P.; Kuehr, R.; Bel, G. The Global E-waste Monitor 2020. Available online: <http://ewastemonitor.info/> (accessed on 20 September 2021).

4. Suhariyanto, T.T.; Wahab, D.A.; Rahman, M.N.A. Multi-Life Cycle Assessment for sustainable products: A systematic review. *J. Clean. Prod.* **2017**, *165*, 677–696. <https://doi.org/10.1016/j.jclepro.2017.07.123>.
5. Peters, K. Methodological issues in life cycle assessment for remanufactured products: A critical review of existing studies and an illustrative case study. *J. Clean. Prod.* **2016**, *126*, 21–37. <https://doi.org/10.1016/j.jclepro.2016.03.050>.
6. Williams, E.D.; Sasaki, Y. Energy analysis of end-of-life options for personal computers: Resell, upgrade, recycle. In Proceedings of the IEEE International Symposium on Electronics and the Environment, Boston, MA, USA, 19–22 May 2003; pp. 187–192. <https://doi.org/10.1109/isee.2003.1208072>.
7. Saxena, P.; Stavropoulos, P.; Kechagias, J.; Salonitis, K. Sustainability assessment for manufacturing operations. *Energies* **2020**, *13*, 2730. <https://doi.org/10.3390/en13112730>.
8. Pazowski, P. Green computing: Latest practices and technologies for ict sustainability computing approaches. In Proceedings of the Managing Intellectual Capital and Innovation for Sustainable and Inclusive Society: Programme of the MakeLearn and TIIM Joint International Conference, 27–29 May 2015, Bari, Italy; ToKnowPress: Celje, Slovenia, 2015; pp. 1853–1860.
9. Ayres, R.U. Life cycle analysis: A critique. *Resour. Conserv. Recycl.* **1995**, *14*, 199–223. [https://doi.org/10.1016/0921-3449\(95\)00017-d](https://doi.org/10.1016/0921-3449(95)00017-d).
10. ISO. Environmental Management—Life Cycle Assessment—Principles and Framework (ISO 14040:2006). Available online: <https://www.iso.org/standard/37456.html> (accessed on 20 July 2021).
11. Fatimah, Y.A.; Biswas, W.K. Sustainability assessment of remanufactured computers. *Procedia CIRP* **2016**, *40*, 150–155. <https://doi.org/10.1016/j.procir.2016.01.087>.
12. Fatimah, Y.A.; Biswas, W.; Mazhar, M.; Islam, M.N. Sustainable manufacturing for Indonesian small- and medium-sized enterprises (SMEs): The case of remanufactured alternators. *J. Remanuf.* **2013**, *3*, 6. <https://doi.org/10.1186/2210-4690-3-6>.
13. Fitzpatrick, C.; Hickey, S.; Schischke, K.; Maher, P. Sustainable life cycle engineering of an integrated desktop PC; A small to medium enterprise perspective. *J. Clean. Prod.* **2014**, *74*, 155–160. <https://doi.org/10.1016/j.jclepro.2014.03.042>.
14. Sahni, S.; Boustani, A.; Gutowski, T.G.; Graves, S.C. Reusing personal computer devices—Good or bad for the environment? In Proceedings of the 2010 IEEE International Symposium on Sustainable Systems and Technology, Arlington, VA, USA, 17–19 May 2010; pp. 1–6. <https://doi.org/10.1109/issst.2010.5507714>.
15. European Commission. Preparatory study for ecodesign requirements of EuPs, Lot 3, personal computers (desktops and laptops) and computer monitors. Final report (Task 1–8). *Ind. Res. Dev.* **2007**, *46*, 8–20.
16. Gutowski, T.G.; Sahni, S.; Boustani, A.; Graves, S.C. Remanufacturing and energy savings. *Environ. Sci. Technol.* **2011**, *45*, 4540–4547. <https://doi.org/10.1021/es102598b>.
17. Reinhard, J.; Zah, R.; Wohlgemuth, V.; Jahr, P. *Applying life cycle assessment within discrete event simulation: Practical application of the milan/ecofactory material flow simulator*; Cambridge University Press: Cambridge, UK, 2013.
18. Johansson, B.; Skoogh, A.; Mani, M.; Leong, S. Discrete event simulation to generate requirements specification for sustainable manufacturing systems design. In Proceedings of the 9th Workshop on Performance Metrics for Intelligent Systems, Gaithersburg, MD, USA, 21–23 September 2009. <https://doi.org/10.1145/1865909.1865918>.
19. Thiede, S. *Sustainable Production, Life Cycle Engineering and Management*; Springer: Berlin/Heidelberg, Germany, 2012. <https://doi.org/10.1007/978-3-642-28848-7>.
20. Maidstone, R. Discrete Event Simulation, System Dynamics and Agent Based Simulation: Discussion and Comparison'. *System* **2012**, *1*, 1–6.
21. Andersson, J.; Skoogh, A.; Johansson, B. *Evaluation of Methods Used for Life-Cycle Assessments in Discrete Event Simulation*; Cambridge University Press: Cambridge, UK, 2019; Volume 53, pp. 1689–1699. <https://doi.org/10.1017/CBO9781107415324.004>.
22. Winnes, H.; Fridell, E. Particle emissions from ships: Dependence on fuel type. *J. Air Waste Manag. Assoc.* **2009**, *59*, 1391–1398. <https://doi.org/10.3155/1047-3289.59.12.1391>.
23. RIVM. ReCiPe 2016 v1.1.1. 2017. p. 201. Available online: [www.rivm.nl/en](http://www.rivm.nl/en) (accessed on 15 June 2021).
24. PRe' Consultants. SimaPro Database Manual—Methods Library. Available online: [www.pre-sustainability.com](http://www.pre-sustainability.com) (accessed on 20 July 2021).