

Accepted Manuscript

Sobol' 's sensitivity analysis for a distributed hydrological model of Yichun River Basin, China

Chi Zhang, Jinggang Chu, Guangtao Fu

PII: S0022-1694(12)01061-X

DOI: <http://dx.doi.org/10.1016/j.jhydrol.2012.12.005>

Reference: HYDROL 18633

To appear in: *Journal of Hydrology*


Received Date: 7 August 2012

Revised Date: 2 December 2012

Accepted Date: 4 December 2012

Please cite this article as: Zhang, C., Chu, J., Fu, G., Sobol' 's sensitivity analysis for a distributed hydrological model of Yichun River Basin, China, *Journal of Hydrology* (2012), doi: <http://dx.doi.org/10.1016/j.jhydrol.2012.12.005>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

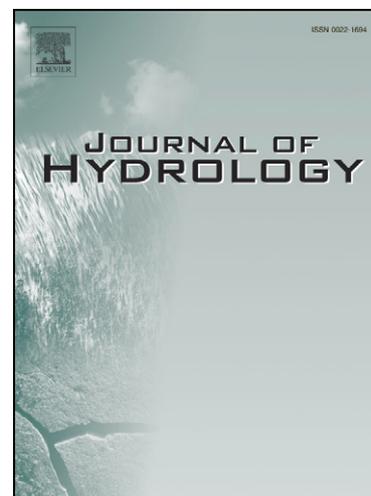

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

**Sobol's sensitivity analysis for a distributed hydrological
model of Yichun River Basin, China**

Chi Zhang¹, Jinggang Chu^{1*}, and Guangtao Fu²

¹ School of Hydraulic Engineering, Dalian University of Technology, Dalian 116024,
China

² Centre for Water Systems, College of Engineering, Mathematics and Physical
Sciences, University of Exeter, North Park Road, Harrison Building, Exeter EX4 4QF,
UK

*Corresponding author: Email: jgchu@mail.dlut.edu.cn; Tel: +86 411 84708517; Fax: +86
411 84708517

21 **Abstract**

22 This paper aims to provide an enhanced understanding of the parameter sensitivities
23 of the Soil and Water Assessment Tool (SWAT) using a variance-based global
24 sensitivity analysis, i.e., Sobol's method. The Yichun River Basin, China, is used as a
25 case study, and the sensitivity of the SWAT parameters is analyzed under typical dry,
26 normal and wet years, respectively. To reduce the number of model parameters, some
27 spatial model parameters are grouped in terms of data availability and multipliers are
28 then applied to parameter groups, reflecting spatial variation in the distributed SWAT
29 model. The SWAT model performance is represented using two statistical metrics -
30 Root Mean Square Error (RMSE) and Nash-Sutcliffe Efficiency (NSE) and two
31 hydrological metrics – RunOff Coefficient Error (ROCE) and Slope of the Flow
32 Duration Curve Error (SFDCE). The analysis reveals the individual effects of each
33 parameter and its interactions with other parameters. Parameter interactions contribute
34 to a significant portion of the variation in all metrics considered under moderate and
35 wet years. In particular, the variation in the two hydrological metrics is dominated by
36 the interactions, illustrating the necessity of choosing a global sensitivity analysis
37 method that is able to consider interactions in the SWAT model identification process.
38 In the dry year, however, the individual effects control the variation in the other three
39 metrics except SFDCE. Further, the two statistical metrics fail to identify the SWAT
40 parameters that control the flashiness (i.e., variability of mid-flows) and overall water
41 balance. Overall, the results obtained from the global sensitivity analysis provide an
42 in-depth understanding of the underlying hydrological processes under different
43 metrics and climatic conditions in the case study catchment.

44

45 **Keywords** Climate conditions; Sensitivity analysis; Hydrological modeling; Sobol's

ACCEPTED MANUSCRIPT

47 **1. Introduction**

48 Distributed hydrological models have gained increasing attention in recent years due
49 to the increasing availability of spatially distributed data and advances in computing
50 power (Beven and Kirkby, 1979; Abbott et al., 1986; Boyle et al., 2001; Panday and
51 Huyakorn, 2004; Duffy, 2004). These models have been applied to advance scientific
52 understanding of underlying hydrological processes, analyse the potential impacts of
53 land use and climate change, and develop water quantity and quality management
54 options for informed decision making (e.g., Beven and Binley, 1992; Tang et al.,
55 2007a).

56 The Soil and Water Assessment Tool (SWAT) is a particular example of complex,
57 spatially distributed hydrological models (Arnold et al., 1993). To determine the most
58 influential parameters of a SWAT model, the Latin Hypercube-One factor At a Time
59 (LH-OAT) algorithm is often applied, as this method is incorporated in SWAT (van
60 Griensven et al., 2006). The LH-OAT method provides an estimation of the
61 parameters' ranking according to their influence on the model output. However, it
62 does not provide an estimation of the proportion of the total influence that one
63 parameter has on the output, nor its interactions with other parameters. Therefore, this
64 method might not be able to identify some influential parameters, whose effects are
65 mainly from interactions with other parameters.

66 Sobol's method is a global sensitivity analysis method and is able to provide the
67 impacts of each parameter and its interactions with other parameters on the model
68 output (Sobol', 1993). Recently Sobol's method has become increasingly popular in
69 hydrological modeling due to its ability to incorporate parameter interactions and the
70 relatively straightforward interpretation of its indices (e.g., Pappenberger et al., 2008;
71 van Werkhoven et al., 2008; Yang, 2011; Fu et al., 2012). Tang et al. (2007b)

72 comprehensively compared Sobol's method with three other sensitivity analysis tools
73 including the Parameter Estimation Software (PEST) (Doherty, 2004), Regional
74 Sensitivity Analysis (RSA) (Young, 1978; Hornberger and Spear, 1981), and Analysis
75 of Variance (ANOVA) (Neter et al., 1996; Mokhtari and Frey, 2005). They found that
76 Sobol's method is the most effective approach to globally characterize single- and
77 multi-parameter interactive sensitivities for lumped watershed models. Build on this
78 prior study, Tang et al. (2007a) used Sobol's method to a distributed hydrological
79 watershed model termed as the Hydrology Laboratory Research Distributed
80 Hydrologic Model (HL-RDHM), and the sensitivity analysis results obtained
81 demonstrated that the method provides robust sensitivity rankings and that these
82 rankings could be used to significantly reduce the number of parameters when
83 calibrating the HL-RDHM. Further, Wagener et al. (2009) highlighted the importance
84 of using multiple performance metrics to analyse the sensitivities of a distributed
85 hydrological model using the Sobol's method.

86 More recently the Sobol's sensitivity analysis method has been applied to SWAT
87 (e.g., Cibin et al., 2009; Nossent et al., 2011). Cibin et al. (2009) used Sobol's method
88 to analyse the sensitivities of SWAT models for two watersheds with different climatic
89 settings and flow regimes, by considering each parameter's individual contribution
90 (first order index) and the total contribution (total order index) to the model output in
91 terms of two commonly used statistical metrics, i.e., Root Mean Square Error (RMSE)
92 and Nash-Sutcliffe Efficiency (NSE). The results indicated that modeled stream flows
93 show varying sensitivity to parameters in different climatic settings and flow regimes.
94 Nossent et al. (2011) presented a Sobol's sensitivity analysis for a SWAT model of the
95 Kleine Nete River watershed, Belgium, by analyzing the first order, second order and
96 total sensitivity effects of model parameters on one single model performance metric -

97 NSE. The results indicated that the curve number factor is the most important
98 parameter of the model and that no more than 9 parameters (out of 26) are needed to
99 have an adequate representation of the model variability. It is also shown that there are
100 significant interactions between three pairs of variables, which otherwise cannot be
101 revealed by other methods only analyzing the impacts of individual parameters. The
102 prior researches have demonstrated the benefits of Sobol's method in identification of
103 SWAT models, but are limited in analyzing multiple model performance metrics (such
104 as hydrological metrics) and discussing the detailed interactions between model
105 parameters.

106 In this paper, Sobol's method is used to perform a detailed sensitivity analysis
107 for a SWAT model of Yichun River Basin, China, by analyzing the individual effects
108 of each parameter and its interactions with other parameters on the model output
109 regarding four different metrics: RMSE, NSE, runoff coefficient error (ROCE) and
110 slope of the flow duration curve error (SFDCE). Further, the model parameter
111 sensitivities are evaluated for wet, moderate, and dry years with the intent of
112 identifying the key parameters and parameter interactions under different climate
113 conditions. The results from this study provide an in-depth understanding of the
114 sensitivity of the SWAT parameters and highlight the significance of the interactions
115 between model parameters. In addition, this paper also shows the effectiveness of the
116 variance-based Sobol's method in sensitivity analysis of SWAT models.

117

118 **2. Methodology**

119 **2.1 Overview of SWAT Model**

120 The SWAT model is a catchment-scale distributed hydrological model developed by
121 the Agricultural Research Service of the United States Department of Agriculture

122 (Arnold et al., 1998). The model is based on physical processes and is capable of
123 continuous simulation over long time periods. SWAT was developed with an aim to
124 predict the impact of land management practices on water, sediment and agriculture
125 chemical yields in large complex watersheds with varying soils, land use and
126 management conditions over long periods of time. The model is a catchment-scale
127 dynamic simulation model and thus can use the spatial information provided by
128 Geographic Information System and Remote Sensing to simulate a number of
129 hydrological response units. SWAT was designed as a long-term yield model.
130 Although the model can be run at a daily time step when the Soil Conservation
131 Service (SCS) curve number method is used to calculate surface runoff, the simulation
132 results can be reported on a daily, monthly or yearly basis. It is not designed to
133 accurately simulate detailed, single-event flood routing (Neitsch et al., 2001).

134 The SWAT model has been widely used to evaluate the impact of climate, land
135 use, and land management decisions on stream flow and water quality, and gained
136 international recognition as is evidenced by a large number of applications of this
137 model (Arnold et al., 1998; Arnold and Fohrer, 2005; Confesor and Whittaker, 2007;
138 Zhang et al., 2008; Anand et al., 2007; Gassman et al., 2007). Take China as a
139 particular example, the SWAT applications include the Heihe Basin (Huang and
140 Zhang, 2004; Wang et al., 2003), the Luohe Watershed (Zhang et al., 2003a and b), the
141 Yuzhou Reservoir Basin (Zhang et al., 2004), the Luxi Watershed (Hu et al., 2003),
142 the Huai River Basin (Wang and Xia, 2010), the Biliu River Basin (Chu et al., 2012;
143 Zhang et al., 2012), and the Huifa River Basin (Zhang et al., 2012). However, none of
144 the above applications includes a global sensitivity analysis to advance the
145 understanding of the effects of model parameters on the model performance in terms
146 of traditional model evaluation metrics (statistical error) and additional hydrological

147 metrics.

148 2.2 Sobol's Method

149 Sobol's method (Sobol', 1993) is a global sensitivity analysis approach based on
 150 variance decomposition. Non-linear and non-monotonic models could be represented
 151 in the following functional form:

$$152 \quad Y = f(X) = f(X_1, \dots, X_p) \quad (1)$$

153 where Y is the goodness-of-fit metric of model output, and $X = (X_1, \dots, X_p)$ is the
 154 parameter set. In Sobol's method, the total variance of function f , $D(y)$, is
 155 decomposed into component variances from individual parameters and their
 156 interactions:

$$157 \quad D(y) = \sum_i D_i + \sum_{i < j} D_{ij} + \sum_{i < j < k} D_{ijk} + \dots + D_{12 \dots p} \quad (2)$$

158 where D_i is the amount of variance due to the i th parameter X_i , and D_{ij} is the
 159 amount of variance due to the interaction between parameter X_i and X_j . The
 160 sensitivity of single parameter or parameter interaction, i.e. Sobol's sensitivity indices
 161 of different orders, is then assessed based on their percentage contribution to the total
 162 variance D :

$$163 \quad \text{First-order index } S_i = \frac{D_i}{D} \quad (3)$$

$$164 \quad \text{Second-order index } S_{ij} = \frac{D_{ij}}{D} \quad (4)$$

$$165 \quad \text{Total-order index } S_{T_i} = 1 - \frac{D_{-i}}{D} \quad (5)$$

166 where D_{-i} is the amount of variance due to all of the parameters except for X_i , S_i
 167 measures the sensitivity from the main effect of X_i , S_{ij} measures the sensitivity

168 from the interactions between X_i and X_j , and S_{T_i} measures the main effect of
 169 X_i and its interactions with all the other parameters.

170 The variances in Eq. (2) can be evaluated using approximate Monte Carlo
 171 numerical integrations, particularly when the model is highly nonlinear and complex.
 172 The Monte Carlo approximations for D , D_i , D_{ij} , and D_{-i} are defined as
 173 presented in the following prior studies (Sobol', 1993, 2001; Hall et al., 2005):

$$174 \quad \hat{f}_0 = \frac{1}{n} \sum_{s=1}^n f(X_s) \quad (6)$$

$$175 \quad \hat{D} = \frac{1}{n} \sum_{s=1}^n f^2(X_s) - \hat{f}_0^2 \quad (7)$$

$$176 \quad \hat{D}_i = \frac{1}{n} \sum_{s=1}^n f(X_s^{(a)}) f(X_{(-i)s}^{(b)}, X_{is}^{(a)}) - \hat{f}_0^2 \quad (8)$$

$$177 \quad \hat{D}_{ij}^c = \frac{1}{n} \sum_{s=1}^n f(X_s^{(a)}) f(X_{(-i, \sim j)s}^{(b)}, X_{(i,j)s}^{(a)}) - \hat{f}_0^2 \quad (9)$$

$$178 \quad \hat{D}_{ij} = \hat{D}_{ij}^c - \hat{D}_i - \hat{D}_j \quad (10)$$

$$179 \quad \hat{D}_{-i} = \frac{1}{n} \sum_{s=1}^n f(X_s^{(a)}) f(X_{(-i)s}^{(a)}, X_{is}^{(b)}) - \hat{f}_0^2 \quad (11)$$

180 where n is the sample size, X_s is the sampled individual in the scaled unit
 181 hypercube, and superscripts (a) and (b) represent two different samples. All of the
 182 parameters take their values from sample (a) are represented by $X_s^{(a)}$. The variables
 183 $X_{is}^{(a)}$ and $X_{is}^{(b)}$ denote that parameter X_{is} uses the sampled values in sample (a)
 184 and (b) , respectively. The symbols $X_{(-i)s}^{(a)}$ and $X_{(-i)s}^{(b)}$ represent cases when all of the
 185 parameters except for X_{is} use the sampled values in sample (a) and (b) ,
 186 respectively. The symbol $X_{(i,j)s}^{(a)}$ represents parameters X_{is} and X_{js} with sampled

187 values in sample (a). Finally, $X_{(-i, \sim j)s}^{(b)}$ represents the case when all of the
188 parameters except for X_{is} and X_{js} utilize sampled values from sample (b).

189 Although Sobol's method has intensive computational requirements, its
190 sensitivity indices have been shown to be more effective than other approaches in
191 capturing the interactions between a large number of variables for highly nonlinear
192 models (Tang et al., 2007a and b). Building on the recommendations of Tang et al.
193 (2007a), the Latin Hypercube sampling method (McKay et al., 1979) was used for
194 implementing Sobol's method. Overall computing the first-order, second-order and
195 total-order sensitivity indices requires $n \times (m + 2)$ model evaluations where n is
196 the number of Latin Hypercube samples and m is the number of parameters being
197 analyzed.

198 **2.3 Latin Hypercube Sampling**

199 Monte Carlo sampling is in general robust, but may require a high number of samples
200 and consequently a large amount of computational resources (time and disk memory).
201 The concept of the Latin Hypercube Sampling (LHS) (McKay et al., 1979; McKay,
202 1988) is based on the Monte Carlo Simulation but uses a stratified sampling approach
203 that allows efficient estimation of the output statistics. LHS divides the distribution of
204 each parameter into N ranges, each with a probability of occurrence equal to $1/N$.
205 Random values of the parameters are generated such that each range is sampled only
206 once, that is, N samples are generated for each parameter. The process can be
207 repeated p times for all the variables so that a sample of total size $N \times p$ is created
208 with random sample combinations of different variables. The LHS method was
209 chosen in this paper due to its popularity and effectiveness in hydrological and water
210 quality modeling (Tang et al., 2007a and b; Fu et al., 2009; Fu et al., 2011).

211 **2.4 Bootstrap method**

212 The bootstrap method (Efron and Tibshirani, 1993) was used to provide confidence
213 intervals for the parameter sensitivity rankings for the Sobol's method. Essentially,
214 the samples generated by LHS were resampled n times when calculating the
215 sensitivity indices for each parameter, resulting in a distribution of the indices. The
216 percentile method and the moment method were used for attaining the bootstrap
217 confidence intervals. The moment method is based on large sample theory and
218 requires a sufficiently large resampling dimension to yield symmetric 95% confidence
219 intervals. The percentile method is very simple, but a higher number of resamples are
220 necessary for the moment method to achieve a reliable estimate of the percentiles. The
221 moment method can result in a poorly estimated confidence interval if the bootstrap
222 distribution is skewed (Archer et al., 1997).

223

224 **3. Case Study**

225 **3.1 Yichun River Basin Description**

226 The SWAT model is used to simulate the case study catchment, Yichun River Basin,
227 China, with a daily time step. The basin boundary and the associated SWAT model
228 sub-watershed boundaries are presented in **Error! Reference source not found.**
229 Yichun River Basin has a drainage area of 2405.7km², and is a major tributary to the
230 Tang-Wang River. Yichun River Basin is dominated by dark brown soils (>71%) and
231 forest land use (>74%). There are 10 sub-watersheds defined in Yichun River Basin,
232 where 7 rain gauges and 1 streamflow gauge are located. The Tang-Wang River is the
233 first level tributary of the left bank of the Song-Hua River. The total length of the
234 Tang-Wang River is approximately 509km. Its basin drains an area of 20383km². The
235 climate of the Tang-Wang River basin, located in the middle and high latitudes, is

236 continental monsoon of cold temperate zone. The seasonal change of the Tang-Wang
237 River basin is obvious, and the mean annual precipitation and evaporation is about
238 617.4mm and 541mm respectively.

239 **3.2 Data Set**

240 The data requirement for SWAT modeling primarily includes: the Digital Elevation
241 Model (DEM), the digital river network, the land use and soil data, the
242 hydrometeorological data (precipitation, temperature, solar radiation, wind speed,
243 relative humidity and stream flow).

244 (1) DEM data (raster resolution: 90m×90m) were obtained from the International
245 Scientific Data Service Platform of the Computer Network Information Center,
246 Chinese Academy of Sciences (<http://srtm.csi.cgiar.org>).

247 (2) Soil data (scale = 1:10⁶) and land use data (scale = 1:10⁵) for the 1980s were
248 collected from Data Center for Resources and Environmental Sciences Chinese
249 Academy of Sciences (RESDC, <http://www.resdc.cn/>).

250 (3) Digital river network data (scale = 1:2.5×10⁵) were obtained from 1:4M-scale
251 Topographic Database of the National Fundamental Geographic Information System
252 of China.

253 (4) Daily Meteorological data (temperature, solar radiation, wind speed, relative
254 humidity) were obtained from China Meteorological Data Sharing Service System
255 (<http://cdc.cma.gov.cn/>) and presented in Table 1.

256 (5) Daily precipitation data and stream flow data were obtained from
257 Hydrological Administration of Heilongjiang Province and presented in Table 1.

258 **3.3 Model Setup and Parameterization**

259 To evaluate SWAT model parameter sensitivities for wet, moderate, and dry years
260 with the intent of identifying the key parameters impacting different years (wet,

261 moderate, and dry years), three scenarios are constructed: (1) daily sensitivity analysis
262 using a wet year of observations, (2) daily sensitivity analysis using a moderate year
263 of observations, and (3) daily sensitivity analysis using a dry year of observations. Fig.
264 2a shows the annual precipitation time series of Yichun River Basin between 1979
265 and 2001. Fig. 2b shows the exceedance probabilities of annual precipitation for
266 Yichun River Basin. It can be seen that years 1982-1985 are a typical representation
267 of the catchment climate from wet to dry, that is, year 1982 is dry, years 1983 and
268 1984 are moderate, and year 1985 is wet. The time series of the four years'
269 precipitation and observed streamflow are presented in Fig. 3.

270 The flow-related parameters of the SWAT and their ranges are listed in Table 2.
271 These 28 model parameters impact snowmelt, surface runoff, groundwater, lateral
272 flow and evapotranspiration predictions. The parameter ranges were based mainly on
273 the default ranges in the SWAT2000 model documentation.

274 Note that some SWAT model parameters in this case study are not regarded as a
275 spatial variable but instead a constant value across all model spatial units, for example,
276 those parameters related to snowmelt. Many other parameters such as SCS curve
277 numbers and soil properties are spatially varied and therefore can be assigned
278 different values for different spatial units. If all parameters of different spatial units
279 are considered for model calibration, the total number of parameters increases to more
280 than 100. This could significantly increase the complexity and computational
281 requirement of a sensitivity analysis. Since the analysis in this paper is based on one
282 monitoring location only due to data availability, thus spatially varying model
283 parameters were not analyzed for each spatial unit. Instead, a single factor was used to
284 represent spatial variation, by increasing or decreasing spatially varying parameter
285 values from their base or default values. For each parameter, this approach maintains

286 the relative differences in the base or default parameter values assigned to different
287 spatial units.

288 For each scenario, the first two months (January and February) are used as a
289 warm up period for model simulation. And the rest of time periods in each scenario
290 are used to assess the model's performance in the sensitivity analysis process.

291 3.4 Goodness-of-fit metrics

292 The sensitivity analyses for SWAT model with Sobol's method consider four
293 goodness-of-fit metrics: two statistical metrics and two hydrological metrics. This
294 allows for a more accurate capture of model performance from different aspects.
295 Statistical metrics focus on the hydrograph (i.e., errors and trends), while hydrological
296 metrics focus on different functional behaviors of the basin (e.g., peakedness and flow
297 duration curve).

298 The two statistical metrics - root mean squared error (RMSE) and Nash-Sutcliffe
299 Efficiency (NSE) - are used to address flow prediction errors and trends, respectively.
300 The RMSE and NSE metrics are computed using equations (12) and (13),
301 respectively,

$$302 \quad RMSE = \sqrt{\frac{1}{n} \sum_{i=1}^n (Q_{pi} - Q_{ti})^2} \quad (12)$$

$$303 \quad NSE = 1 - \frac{\sum_{i=1}^n (Q_{pi} - Q_{ti})^2}{\sum_{i=1}^n (Q_{ti} - \bar{Q}_t)^2} \quad (13)$$

304 where Q_{pi} and Q_{ti} are the simulated and measured flows on day i , n is the total
305 number of days and \bar{Q}_t is the mean daily measured flows in the analyzed period.

306 The runoff coefficient error (ROCE) and slope of the flow duration curve error
307 (SFDCE) metrics are used to evaluate the model's accuracy in simulating a basin's

308 water balance and flashiness (i.e., variability of mid-flows), respectively. The ROCE
 309 metric is computed as the absolute difference between the simulated and observed
 310 average annual runoff coefficient:

$$311 \quad ROCE = abs\left(\frac{\overline{Q}_p}{\overline{P}} - \frac{\overline{Q}_t}{\overline{P}}\right) \quad (14)$$

312 where \overline{Q}_p represents the simulated average annual flow and \overline{Q}_t is the observed
 313 average annual flow. Both flows are normalized by the observed average annual
 314 precipitation \overline{P} .

315 The SFDCE metric is computed as the absolute error in the slope of the flow
 316 duration curve between the 30th and 70th percentiles of predicted and observed flows
 317 to measure the error of the model generated distribution of mid-range flows:

$$318 \quad SFDCE = abs\left(\frac{Q_{p,70} - Q_{p,30}}{40} - \frac{Q_{t,70} - Q_{t,30}}{40}\right) \quad (15)$$

319 where $Q_{p,30}$ and $Q_{p,70}$ are the simulated 30th and 70th percentile flows within the
 320 simulated flow duration curve and $Q_{t,30}$ and $Q_{t,70}$ are the observed 30th and 70th
 321 percentile flows within the simulated flow duration curve.

322 **3.5 Sensitivity Analysis Implementation**

323 Statistical sample size is a key parameter for Sobol's method. Tang et al. (2007b)
 324 used a sample size of 8192 for Sobol' analysis when considering 18 model parameters,
 325 and suggested that this number is extremely conservative. Fu et al. (2012) used a set
 326 of 2000 LHS samples for 21 parameters in a hydraulic analysis of water distribution
 327 network. Tang et al. (2007a) used a sample size of 2000 for 403 variables in a
 328 distributed hydrologic model and this number was proved sufficient to maintain the
 329 accuracy and repeatability of Sobol' analysis. On the basis of these prior studies, a

330 LHS sample size of 2000 was used in this study for all three scenarios resulting in
331 $2000 \times (28 + 2) = 60,000$ model runs for each scenario. A comparison of results with
332 smaller sample sizes show this sample size is sufficient and the sensitivity indices are
333 reliable.

334

335 **4. Results and Discussion**

336 The first- and total-order sensitivity indices of 28 parameters are shown in Fig.4. In
337 Fig.4, each column of panels represents one of the three scenarios: dry year (1982),
338 moderate year (1983-1984) and wet year (1985), and each row represents one of the
339 four metrics. In each panel, the x -axis represents parameter numbers, and y -axis
340 represents first- and total- order sensitivity indices. The first order indices are
341 represented by black bars, which measure individual parameter contributions to the
342 variance of the four goodness-of-fit metrics. The total-order indices are presented by
343 the total height of bars measuring individual and interactive parameter contributions
344 to the variance of the four goodness-of-fit metrics. It should be noted that the grey
345 bars measure the total interactive contribution of one parameter with all the other
346 parameters. Fig.5 provides a detailed description of the second-order indices, i.e., the
347 contributions of the interactions between two parameters to the variance of the four
348 goodness-of-fit metrics in the three scenarios. Sensitive parameters are defined with a
349 10% threshold of total order index in Fig.4, and similarly significant second-order
350 interactions are defined with a 1% threshold in Fig.5. These thresholds are subjective
351 and their ease-of-satisfaction decreases with increasing numbers of parameters or
352 parameter interactions (Tang et al., 2007a and b). The main findings are analysed for
353 each metric below.

354 **4.1 Statistical metrics: RMSE and NSE**

355 For the RMSE metric, there are three sensitive parameters (total order index>10%) for
356 the 1982 dry year scenario, i.e., the lateral flow travel time (LAT_TTIME), base flow
357 alpha factor (ALPHA_BF), and maximum canopy storage (CANMX). However, in
358 the 1983-1984 year scenario, the metric variance is attributed to more parameters, that
359 is, there are a total of seven parameters with a total-order index greater than 10%,
360 including deep aquifer percolation fraction (RCHRG_DP), runoff curve number
361 multiplicative factor (CN2), groundwater delay time (GW_DELAY), and threshold
362 groundwater depth for return flow (GWQMN) in addition to the three parameters
363 LAT_TTIME, ALPHA_BF, and CANMX in the dry year scenario. Similarly, in the
364 wet year scenario, five parameters are highly sensitive with a total-order index bigger
365 than 10%. Amongst these sensitive parameters, LAT_TTIME is the most sensitive
366 parameter, accounting for 59%, 27%, and 36% of the total variance in the dry,
367 moderate, and wet scenarios, respectively. The above results confirm the finding by
368 Nossent et al. (2011) that only a small number of parameters are highly sensitive in
369 SWAT.

370 The amount of lateral flow discharged to the main channel on any given day is
371 controlled by LAT_TTIME. The sensitivity of daily runoff simulations to
372 LAT_TTIME in Yichun River Basin was expected due to lesser mean annual
373 precipitation in the basin. The moderate and wet scenarios have smaller total-order
374 sensitivity indices of LAT_TTIME than the dry scenario due to more precipitation.
375 Furthermore, it should be noted that the parameters related to groundwater flow, i.e.,
376 GW_DELAY, ALPHA_BF, GWQMN, and RCHRG_DP have a more significant
377 interactions with other parameters from a dry year 1982 through transition years
378 1983-1984 to a wet year 1985. This is because the interactions between regional

379 surface water and groundwater become more and more frequent with the increase of
380 precipitation and water in soil profile and shallow aquifer in a wetter year. These
381 interactions could not be revealed by using other methods such as LH-OAT.

382 Additionally, it should be noted that first-order indices of parameters account for
383 most proportion of their total-order indices for the 1982 dry year scenario in Yichun
384 River Basin due to few interactions between parameters, especially the few
385 interactions between regional surface water and groundwater, in the situations where
386 little precipitation occurs and stream flow is generated. From dry year through
387 moderate year to wet year, the proportions of the effects of parameter interactions on
388 the model output to their total-order indices increase gradually, especially the
389 parameters related to groundwater flow and having substantial interactions with
390 surface water, e.g., ALPHA_BF and GWQMN. However, some parameters related to
391 groundwater flow, such as GW_DELAY and RCHRG_DP, having a highly interactive
392 effect on the model output for the 1983-1984 year scenario, have less interactive
393 effects on the model output for the 1985 wet year scenario. The reason is that the soil
394 and shallow aquifer have been saturated in a wetter year, and the changes of these
395 parameter values tend to have less influence on other parameters.

396 It is interesting to note the similarity of the sensitivity results for the two
397 statistical metrics (RMSE and NSE) for every scenario analyzed due to their focus on
398 addressing flow prediction errors and trends with the simulated and measured flows.

399 **4.2 Hydrological metrics: ROCE and SFDCE**

400 For the ROCE metric, there are three sensitive parameters (total order index>10%) for
401 the 1982 dry year scenario, i.e., LAT_TTIME, CANMX, and GWQMN. In the
402 1983-1984 year scenario, three parameters, i.e., GWQMN, RCHRG_DP, and
403 CANMX, are highly sensitive. In the wet year scenario, three parameters, i.e.,

404 GWQMN, RCHRG_DP, and GW_DELAY, are highly sensitive. Amongst these
405 sensitive parameters, LAT_TTIME is the most sensitive parameter in the dry scenario,
406 accounting for 34% of the total variance, and GWQMN is the most sensitive
407 parameter in the moderate and wet scenarios, accounting for 53% and 59% of the total
408 variance, respectively.

409 The overall parameter sensitivity for the long-term water balance metric (ROCE)
410 is distinctly different from those statistical metrics. Rather than addressing flow
411 prediction errors and trends with the simulated and measured flows, the model
412 performance in terms of ROCE is controlled by parameters that affect the volume of
413 ET losses across all watersheds, i.e., LAT_TTIME, CANMX, GWQMN, RCHRG_DP,
414 and GW_DELAY. This result reflects the fact that these parameters largely control the
415 volume (rather than the shape in the case of statistical metrics) of the hydrograph,
416 which impacts the long-term water balance. In the SWAT model, ET losses occur
417 primarily from stream flow, water intercepted by the plant canopy, water in soil
418 profile and shallow aquifer. The amount of losses from each of the above processes
419 depends on the demand (potential ET for that time of year) and the supply (water
420 content of the storage). The parameters that are sensitive to the long-term water
421 balance are those affecting not only the size of these storages (i.e., the potential
422 volume of losses) but also the amount of water that goes into these storages. The
423 amount of lateral flow discharged to the main channel on any given day is controlled
424 by LAT_TTIME. The values of LAT_TTIME and CANMX are more influential on
425 the model output as compared to the other parameters for the 1982 dry year scenario
426 in the Yinchun River Basin because the stream flow and water intercepted by the plant
427 canopy are effectively available for ET losses for the dry year scenario. In the
428 moderate and wet years, the water that goes into soil profile and shallow aquifer are

429 more effectively available for ET losses. Therefore, it is reasonable that GWQMN is
430 more sensitive than other parameters, and the parameters related to groundwater flow
431 have significant interactions with other parameters affecting stream flow for the
432 1983-1984 year and the wet year scenarios in Yichun River Basin. Some parameters
433 related to lateral flow and groundwater flow, such as LAT_TTIME and RCHRG_DP,
434 have many interactive effects on the model output for the 1983-1984 year scenario
435 similarly, however, have less interactive effects on the model output for the 1985 wet
436 year scenario because the soil and shallow aquifer have been saturated in a wetter year,
437 and the changes of these parameter values tend to have less influence on ET losses.

438 For the SFDCE metric, there are six sensitive parameters (total order index>10%)
439 for the 1982 dry year scenario, i.e., CANMX, GWQMN, GW_DELAY, LAT_TTIME,
440 ALPHA_BF, and RCHRG_DP. In the 1983-1984 year scenario, five parameters, i.e.,
441 GWQMN, CANMX, LAT_TTIME, RCHRG_DP, and GW_DELAY, are highly
442 sensitive. In the wet year scenario, three parameters, i.e., GWQMN, RCHRG_DP, and
443 GW_DELAY are highly sensitive. Amongst these sensitive parameters, CANMX is
444 the most sensitive parameter in the dry scenario, accounting for 49% of the total
445 variance, and GWQMN is the most sensitive parameter in the moderate and wet
446 scenarios, accounting for 37% and 76% of the total variance, respectively.

447 It is interesting to note the similarity and difference of the sensitivity results for
448 the two hydrological metrics (ROCE and SFDCE) for every scenario analyzed. The
449 similarity of the sensitivity results for the two hydrological metrics is due to their
450 common characteristics of hydrological metrics. The difference of the sensitivity
451 results for the two hydrological metrics is due to their focuses on different functional
452 behaviors of the basin. The metric, SFDCE, evaluates the error in the slope of the
453 flow duration curve between the 30 and 70 percentile flow magnitudes. It thus

454 captures the parameter impacts on the variability in flow magnitudes (rather than their
455 impact on long-term runoff volume as for ROCE). Comparing sensitivities across the
456 basin for this metric, it is seen that the ET controlling parameters (CANMX and
457 GWQMN) again become sensitive for SFDCE as they do for ROCE. However, the
458 number of sensitive parameters for SFDCE is larger than that for ROCE and more
459 interactions between parameters in the 1982 dry year scenario, e.g., the interactive
460 effects of GWQMN with great influences on the interactions between groundwater
461 flow and stream flow, and the number of sensitive parameters for SFDCE is less with
462 the increase of precipitation for the 1983-1984 year and the 1985 wet year scenarios
463 because the SFDCE metric is computed to capture the parameter sensitivities for the
464 30-70 percentile range of flows, i.e., the sensitivities of the parameters more
465 frequently 'activated' over the 30-70 percentile range of flows. Wagener et al. (2009)
466 found that the sensitivities of hydrological metrics are more evenly distributed to
467 model parameters compared to the two statistical metrics under a single rainfall event.
468 However in this case study the same finding is revealed for the dry year only and is
469 not shown for the moderate and wet years. This highlights the importance of
470 considering different climate conditions in analyzing the sensitivities of model
471 parameters.

472 The Sobol's sensitivity indices can have a high degree of uncertainty due to the
473 difficulty in numerical approximation (Tang et al., 2007a & b). In this study, we used
474 statistical bootstrapping to provide 95% confidence intervals for Sobol's method.
475 Figure 4 provides the confidence intervals for the total-order indices computed for
476 different metrics in the three climate scenarios. It can be seen from Figure 4 that
477 similar to the findings from Tang et al. (2007a & b) the intervals are rather large,
478 which cannot be reduced even when a larger number of samples are used. However,

479 with the presence of the confidence intervals, the uncertainty of the sensitivity indices
480 could be revealed, informing the selection of sensitive model parameters.

481 **4.3 Interactive effects**

482 The pairwise interactions that are revealed by the Sobol's method elucidate some
483 important model processes and in particular how one process influences another.

484 Recall from Fig.4 that RCHRG_DP has a lot of interactive effects on all the four
485 metrics in the case of 1983-1984 year scenario. In Fig.5, it can be seen that this
486 parameter interacts with LAT_TTIME and CANMX only, particularly LAT_TTIME,
487 for the two statistical metrics. The above interactions could be expected, as these
488 parameters have a large influence on the interactions between groundwater flow and
489 stream flow, particularly the interactions between lateral flow and water flow in
490 shallow aquifer, and the definition on the stream flow response of the system. The
491 more water is diverted to stream flow from plant canopy and lateral flow, the less
492 water is diverted from groundwater. This also leads to a trade-off between the
493 parameter values. GWQMN also has a lot of interactive effects on all the four metrics
494 for 1983-1984 year scenario in Fig.4, but Fig.5 shows that GWQMN has few
495 interactions with other parameters for the two statistical metrics. That means that the
496 interactive effect of GWQMN do not come from second-order interactions, so it might
497 come from higher order interactions (3-order, 4-order ...). For the two hydrological
498 metrics in the case of 1983-1984 year scenario, the RCHRG_DP vs. GWQMN
499 interaction has a significant influence on the model output variability and system ET
500 losses. The relation between RCHRG_DP and GWQMN gives more insight on how
501 the groundwater flow is regulated in the SWAT model and how both parameters
502 contribute to the simulated outflow and storage in shallow aquifer. RCHRG_DP
503 defines the fraction of the recharge that goes to the deep aquifer, and the remaining

504 goes to the shallow aquifer and partly determines the amount of water in this storage.
505 If this amount of water is higher than the GWQMN value, return value occurs and
506 contributes to the total outflow. In this way, RCHRG_DP and GWQMN have an
507 interactive influence on the simulated flow, as RCHRG_DP has an impact on the
508 storage in the shallow aquifer and thus on GWQMN.

509 Similarly, Fig.4 shows that GWQMN and ALPHA_BF have a lot of interactive
510 effects on two statistical metrics in the case of the 1985 wet year scenario. In Fig.5,
511 these interactions can be further revealed and mainly come from five pairwise
512 interactions: GWQMN vs. GW_DELAY, GWQMN vs. RCHRG_DP, GWQMN vs.
513 LAT_TTIME, ALPHA_BF vs. LAT_TTIME, and ALPHA_BF vs. CN2. These
514 parameters have a large influence on the interactions between groundwater flow and
515 stream flow, and the definition on the stream flow response of the system. This also
516 leads to a trade-off between the parameter values. Additionally, Fig.4 shows that
517 GW_DELAY, GWQMN and RCHRG_DP have a lot of interactive effects on two
518 hydrological metrics in the case of the 1985 wet year scenario. In Fig.5, these
519 interactions can be further revealed and mainly come from three pairwise interactions:
520 GW_DELAY vs. GWQMN, GW_DELAY vs. RCHRG_DP, and GWQMN vs.
521 RCHRG_DP. These interactions have a significant influence on the groundwater flow
522 and storage in the shallow aquifer, and determine the amount of water in the shallow
523 aquifer and system ET losses.

524 The results from this study indicate that the sensitivity of the SWAT parameters
525 varies significantly in the dry, normal and wet years simulated, and suggest that a
526 single set of parameter values may not appropriately represent hydrologic processes
527 during various flow regimes. Dynamic updating of parameters during the simulation
528 may be viable in such situations, however, further studies are needed to evaluate if

529 such approaches could improve the SWAT performance.

530 The results from this study also indicate that the use of the two commonly used
531 statistical metrics RMSE and TRMSE fails to identify the SWAT model's parameters
532 that control the flashiness (measured by SFDCE) and water balance (measured by
533 ROCE) of Yichun River Basin. This confirms the finding by Wagener et al. (2009)
534 that the choice of performance metrics has a significant impact on the parameter
535 sensitivities of a distributed hydrological model. Further study is currently in progress
536 to investigate how the results obtained from this study can be used to improve the
537 optimization efficiency in the model calibration process.

538

539 **5. Conclusions**

540 This paper provides a variance-based sensitivity analysis for a SWAT model of Yichun
541 River Basin, China. The analysis reveals the individual effects of each parameter and
542 its interactions with other parameters on the model performance regarding two
543 statistical metrics - RMSE and NSE and two hydrological metrics - ROCE and
544 SFDCE. Model parameter sensitivities are analysed under three difference climate
545 conditions: wet, moderate, and dry years. The main findings from the results obtained
546 are summarized below.

547 (1) The results obtained in this paper confirm that only a small number of model
548 parameters are highly sensitive for all the four metrics considered in SWAT. This is
549 also true when different climatic conditions are considered.

550 (2) The sensitivity of the SWAT parameters varies significantly in the dry,
551 normal and wet years simulated. For example, the lateral flow travel time is very
552 sensitive in most cases, but has little impact on SFDCE in the dry year. Further, the
553 curve number factor, identified as the most important parameter in prior study, is not

554 sensitive in most cases considered in this study when parameter interactions are
555 considered.

556 (3) Parameter interactions contribute to a significant portion of the variation in
557 all metrics considered under moderate and wet years. In particular, the variation in the
558 two hydrological metrics is mainly dominated by the interactions. Sensitive
559 parameters could not be identified if the interactions are discounted. However, in the
560 dry year, the individual effects control the variation in the other three metrics except
561 SFDCE.

562 (4) The two statistical metrics (RMSE and NSE) have a very similar
563 performance in terms of sensitive parameters identified. This is because both of them
564 measure flow prediction errors and trends with the simulated and measured flows.
565 However, the two statistical metrics fail to identify the SWAT parameters that control
566 the flashiness and water balance, illustrating the importance of considering the two
567 hydrologic metrics, i.e., SFDCE and ROCE, in the model identification process.

568

569 *Acknowledgements*

570 This study is supported by the National Natural Science Foundation of China Grants
571 51079014 and 50809010.

572

573 **References**

574 Abbott, M.B., Bathurst, J.C., Cunge, J.A., O'Connell, P.E., Rasmussen, J., 1986. An
575 introduction to the European hydrological system-systeme hydrologique europeen
576 "SHE" 1: History and philosophy of a physically-based, distributed modelling
577 system. *Journal of Hydrology* 87 (1-2), 45-59.

- 578 Anand, S., Mankin, K.R., McVay, K.A., Janssen, K.A., Barnes, P.L., Pierzynski, G.M.,
579 2007. Calibration and validation of ADAPT and SWAT for field-scale runoff
580 prediction. *Journal of the American Water Resources Association* 43 (4), 899-910.
- 581 Archer, G.E.B., Saltelli, A., Sobol, I.M., 1997. Sensitivity measures, ANOVA-like
582 techniques and the use of bootstrap. *Journal of Statistical Computation and*
583 *Simulation* 58 (2), 99-120.
- 584 Arnold, J.G., Allen, P.M., Bernhardt, G., 1993. A comprehensive surface-groundwater
585 flow model. *Journal of Hydrology* 142 (1-4), 47-69.
- 586 Arnold, J.G., Srinivasan, R., Muttiah, R.S., Williams, J.R., 1998. Large area
587 hydrologic modeling and assessment Part I: model development. *Journal of the*
588 *American Water Resources Association* 34 (1), 73-89.
- 589 Arnold, J.G., Fohrer, N., 2005. SWAT 2000: current capabilities and research
590 opportunities in applied watershed modeling. *Hydrological Processes* 19 (3),
591 563-572.
- 592 Beven, K., Binley, A., 1992. The future of distributed models - model calibration and
593 uncertainty prediction. *Hydrological Processes* 6 (3), 279-298.
- 594 Beven, K.J., Kirkby, M.J., 1979. A physically based variable contributing area model
595 of basin hydrology. *Hydrological Sciences Bulletin* 24 (1), 43-69.
- 596 Boyle, D.P., Gupta, H.V., Sorooshian, S., Koren, V., Zhang, Z., Smith, M., 2001.
597 Toward improved streamflow forecasts: Value of semidistributed modeling. *Water*
598 *Resources Research* 37 (11), 2749-2759, doi:10.1029/2000WR000207.
- 599 Carpenter, T.M., Georgakakos, K.P., Sperflagea, J.A., 2001. On the parametric and

- 600 NEXRAD-radar sensitivities of a distributed hydrologic model suitable for
601 operational use. *Journal of Hydrology* 253 (1-4), 169-193.
- 602 Chu, J., Zhang, C., Wang, Y., Zhou, H., Shoemaker, C.A., 2012. A watershed rainfall
603 data recovery approach with application to distributed hydrological models.
604 *Hydrological Processes* 26 (13), 1937-1948.
- 605 Cibin, R., Sudheer, K.P., Chaubey, I., 2010. Sensitivity and identifiability of stream
606 flow generation parameters of the SWAT model. *Hydrological Processes* 24 (9),
607 1133-1148.
- 608 Confesor, R.B., Whittaker, G.W., 2007. Automatic calibration of hydrologic models
609 with multi-objective evolutionary algorithm and pareto optimization. *Journal of the*
610 *American Water Resources Association* 43 (4), 981-989.
- 611 Doherty, J., 2004. PEST-Model Independent Parameter Estimation User Manual: 5th
612 Edition, Watermark Numerical Computing, Brisbane, Australia.
- 613 Duffy, C.J., 2004. Semi-discrete dynamical model for mountain-front recharge and
614 water balance estimation: Rio Grande of southern Colorado and New Mexico, in
615 *Groundwater Recharge in a Desert Environment: The Southwestern United States,*
616 *Water Sci. Appl. Ser., vol. 9,* edited by J. F. Hogan, F. Phillips, and B. Scanlon, pp.
617 255-271, AGU, Washington, D. C.
- 618 Efron, B., Tibshirani, R., 1993. *An Introduction to the bootstrap,* Chapman Hall, New
619 York.
- 620 Fu, G., Butler, D., Khu, S.-T., 2009. The impact of new developments on river water
621 quality from an integrated system modelling perspective. *Science of the Total*

- 622 Environment 407 (4), 1257-1267.
- 623 Fu, G., Butler, D., Khu, S.-T., Sun, S., 2011. Imprecise probabilistic evaluation of
624 sewer flooding in urban drainage systems using random set theory. Water
625 Resources Research 47, W02534, doi:10.1029/2009WR008944.
- 626 Fu, G., Kapelan, Z., Reed, P., 2012. Reducing the complexity of multi-objective water
627 distribution system optimization through global sensitivity analysis. Journal of
628 Water Resources Planning and Management 138 (3), 196-207.
- 629 Gassman, P.W., Reyes, M.R., Green, C.H., Arnold, J.G., 2007. The soil and water
630 assessment tool: historical development, applications and future research directions.
631 Transactions of the ASABE 50 (4), 1211-1250.
- 632 Hall, J.W., Tarantola, S., Bates, P.D., Horritt, M.S., 2005. Distributed sensitivity
633 analysis of flood inundation model calibration. Journal of Hydraulic Engineering
634 131 (2), 117-126.
- 635 Hornberger, G., Spear, R., 1981. An approach to the preliminary analysis of
636 environmental systems. Journal of Environmental Management 12, 7-18.
- 637 Hu, Y., Cheng, S., Jia, H., 2003. Hydrologic simulation in NPS models: Case of
638 application of SWAT in Luxi Watershed. Research of Environmental Sciences 16
639 (5), 29-32 (in Chinese).
- 640 Huang, Q., Zhang, W., 2004. Improvement and Application of GIS-based distributed
641 SWAT hydrological modeling on high altitude, cold, semi-arid catchment of Heihe
642 River Basin, China. Journal of Nanjing Forestry University (Natural Sciences
643 Edition) 28 (2), 22-26 (in Chinese).

- 644 McKay, M.D., 1988. Sensitivity and Uncertainty Analysis Using a Staistical Sample
645 of Input Values, Uncertainty Analysis, Ronen Y., ed. CRC press, Inc. Boca Raton,
646 Florida, 145-186.
- 647 McKay, M.D., Beckman, R.J., Conover, W.J., 2000. A comparison of three methods
648 for selecting values of input variables in the analysis of output from a computer
649 code. Technometrics 42 (1), 55-61.
- 650 Mokhtari, A., Frey, H.C., 2005. Sensitivity Analysis of a Two-Dimensional
651 Probabilistic Risk Assessment Model Using Analysis of Variance. Risk Analysis 25,
652 1511-1529.
- 653 Neitsch, S.L., Arnold, J.G, Kiniry, J.R., Williams, J.R., 2001. Soil and Water
654 Assessment Tool-Version 2000-User's manual. Temple: Texas, USA.
- 655 Neter, J., Kutner, M.H., Nachtsheim, C.J., Wasseman, W., 1996. Applied Linear
656 Statitcal Models, 4th ed., McGraw-Hill, Chicago, IL.
- 657 Nossent, J., Elsen, P., Bauwens, W., 2011. Sobol' sensitivity analysis of a complex
658 environmental model. Environmental Modelling & Software 26 (12), 1515-1525.
- 659 Panday, S., Huyakorn, P.S., 2004. A fully coupled physically-based
660 spatially-distributed model for evaluating surface/subsurface flow. Advances in
661 Water Resources 27 (4), 361-382.
- 662 Pappenberger, F., Beven, K.J., Ratto, M., Matgen, P., 2008. Multi-method global
663 sensitivity analysis of flood inundation models. Advances in Water Resources 31
664 (1), 1-14.
- 665 Sobol', I.M., 1993. Sensitivity estimates for nonlinear mathematical models.

- 666 Mathematical Modeling and Computational Experiment 1 (4), 407-417.
- 667 Sobol', I.M., 2001. Global sensitivity indices for nonlinear mathematical models and
668 their Monte Carlo estimates. *Mathematics and Computers in Simulation* 55,
669 271-280.
- 670 Tang, Y., Reed, P., van Werkhoven, K., Wagener, T., 2007a. Advancing the
671 identification and evaluation of distributed rainfall-runoff models using global
672 sensitivity analysis. *Water Resources Research* 43, W06415,
673 doi:10.1029/2006WR005813.
- 674 Tang, Y., Reed, P., Wagener, T., van Werkhoven, K., 2007b. Comparing sensitivity
675 analysis methods to advance lumped watershed model identification and evaluation.
676 *Hydrology and Earth System Sciences* 11, 793-817.
- 677 van Griensven, A., Meixner, T., Grunwald, S., Bishop, T., Diluzio, M., Srinivasan, R.,
678 2006. A global sensitivity analysis tool for the parameters of multi-variable
679 catchment models. *Journal of Hydrology* 324 (1-4), 10-23.
- 680 van Werkhoven, K., Wagener, T., Reed, P.M., Tang, Y., 2008. Characterization of
681 watershed model behavior across a hydroclimatic gradient. *Water Resources*
682 *Research* 44, W01429, doi:10.1029/2007WR006271.
- 683 van Werkhoven, K., Wagener, T., Reed, P., Tang, Y., 2009. Sensitivity-guided
684 reduction of parametric dimensionality for multi-objective calibration of watershed
685 models. *Advances in Water Resources* 32 (8), 1154-1169.
- 686 Wagener, T., van Werkhoven, K., Reed, P.M., Tang, Y., 2009. Multiobjective
687 sensitivity analysis to understand the information content in streamflow

- 688 observations for distributed watershed modeling. *Water Resources Research* 45,
689 W02501, doi:10.1029/2008WR007347.
- 690 Wang, G., Xia J., 2010. Improvement of SWAT2000 modelling to access the impact of
691 dams and sluices on streamflow in the Huai River basin of China. *Hydrological*
692 *Processes* 24 (11), 1455-1471.
- 693 Wang, Z., Liu, C., Huang, Y., 2003. The theory of SWAT model and its application in
694 Heihe basin. *Progress in Geography* 22 (1), 79-86 (in Chinese).
- 695 Yang, J., 2011. Convergence and uncertainty analyses in Monte-Carlo based
696 sensitivity analysis. *Environmental Modelling and Software* 26 (4), 444-457.
- 697 Young, P.C., 1978. A general theory of modelling for badly defined dynamic systems,
698 in: *Modeling, Identification and Control in Environmental Systems*, edited by:
699 Vansteenkiste, G. C., North Holland, Amsterdam, pp. 103-135.
- 700 Zhang, A., Zhang, C., Fu, G., Wang, B., Bao, Z., Zheng, H., 2012. Assessments of
701 impacts of climate change and human activities on runoff with SWAT for the Huifa
702 River Basin, Northeast China. *Water Resources Management* 26 (8), 2199-2217.
- 703 Zhang, C., Shoemaker, C.A., Woodbury, J.D., Cao, M., Zhu, X., 2012. Impact of
704 human activities on stream flow in the Biliu River basin, China. *Hydrological*
705 *Processes*, doi:10.1002/hyp.9389.
- 706 Zhang, L., Li, X., Wang, Z., Li, X., 2004. Study and application of SWAT model in
707 the Yuzhou Reservoir Basin. *Hydrology* 24 (3), 4-8 (in Chinese).
- 708 Zhang, X., Srinivasan, R., Debele, B., Hao, F., 2008. Runoff simulation of the
709 headwaters of the Yellow River using the SWAT model with three snowmelt

- 710 algorithms. *Journal of the American Water Resources Association* 44 (1), 48-61.
- 711 Zhang, X., Hao, F., Yang, Z., Cheng, H., Li, D., 2003a. Runoff and sediment yield
712 modeling in meso-scale watershed based on SWAT model. *Research of Soil and*
713 *Water Conservation* 10 (4), 38-42 (in Chinese).
- 714 Zhang, X., Hao, F., Cheng, H., Li, D., 2003b. Application of SWAT model in the
715 upstream watershed of the Luohe River. *Chinese Geographical Science* 13 (4),
716 334-339.

717 **List of Figure Captions**

718 **Fig. 1** Yichun river catchment.

719 **Fig. 2** Distinction of annual rainfall for Yichun River Basin between different years.

720 Fig. 2a shows annual rainfall for Yichun River Basin from year 1979 to 2001, Fig. 2b

721 shows the exceedance probability plot of annual rainfall for Yichun River Basin.

722 **Fig. 3** Hydrographs for Yichun River Basin from year 1982 to 1985.

723 **Fig. 4** First-order indices, total-order indices and their confidence intervals

724 computed using different measures for the 28 parameters in the three scenarios. The

725 parameter numbers in the x -axis are shown in Table 2.

726 **Fig. 5** Second-order indices computed using the four goodness-of-fit metrics in the

727 three scenarios. The parameter numbers in the x -axis are shown in Table 2.

728

729

Table 1 Hydrometeorological data for Yichun river basin

Time Scale	Hydrological/meteorological element	Station	Period
Daily	Precipitation	7 gauges, such as Kaiyuan	1979~2001
	Streamflow	Yichun	1979~2001
	Temperature, relative humidity, wind speed and solar radiation	Yichun	1979~2001

730

731

732


Table 2 Parameter list


No.	Name	Brief Description (units)	Minimum	Maximum
1	SFTMP	snow fall temperature (°C)	-5	5
2	SMTMP	snowmelt temperature threshold (°C)	-5	5
3	SMFMX	melt factor for snow on June 21 (mm/°C)	1.5	8
4	SMFMN	melt factor for snow on December 21 (mm/°C)	0	10
5	TIMP	snowpack temperature lag factor	0.01	1
6	ESCO	soil evaporation compensation factor	0.001	1
7	EPCO	plant uptake compensation factor	0	1
8	SURLAG	surface runoff lag coefficient	1	24
9	GW_DELAY	groundwater delay time (days)	0.001	500
10	ALPHA_BF	base flow alpha factor	0.001	1
11	GWQMN	threshold groundwater depth for return flow (mm)	0.001	500
12	GW_REVAP	groundwater “revap” coefficient	0.02	0.2
13	REVAPMN	threshold depth of water in the shallow aquifer for “revap” or percolation to the deep aquifer to occur (mm)	0	500
14	RCHRG_DP	deep aquifer percolation fraction	0	1
15	SLSUBBSN ^a	average slope length multiplicative factor	0.75	1.25
16	SLOPE ^a	average slope steepness multiplicative factor	0.75	1.25
17	LAT_TTIME	lateral flow traveltime (days)	0.001	180
18	CANMX	maximum canopy storage (mm)	0	100
19	BIOMIX	biological mixing efficiency	0	1
20	CN2 ^a	runoff curve number multiplicative factor	0.75	1.25
21	BLAI ^a	maximum potential leaf area index	0.75	1.25
22	CH_N2	manning’s “n” value for the main channel	-0.01	0.3
23	CH_K2	effective hydraulic conductivity in main channel alluvium (mm/hr)	-0.01	500
24	SOL_Z ^a	soil profile total depth multiplicative factor	0.75	1.25
25	SOL_AWC ^a	available water capacity multiplicative factor	0.75	1.25
26	SOL_K ^a	saturated hydraulic conductivity multiplicative factor	0.75	1.25
27	SOL_A1b ^a	moist soil albedo multiplicative factor	0.75	1.25


28	TLAPS	temperature lapse rate (°C/km)	0	50
----	-------	--------------------------------	---	----

733 ^aParameters are multiplicative factors used to adjust the spatial variation across all model units.

ACCEPTED MANUSCRIPT

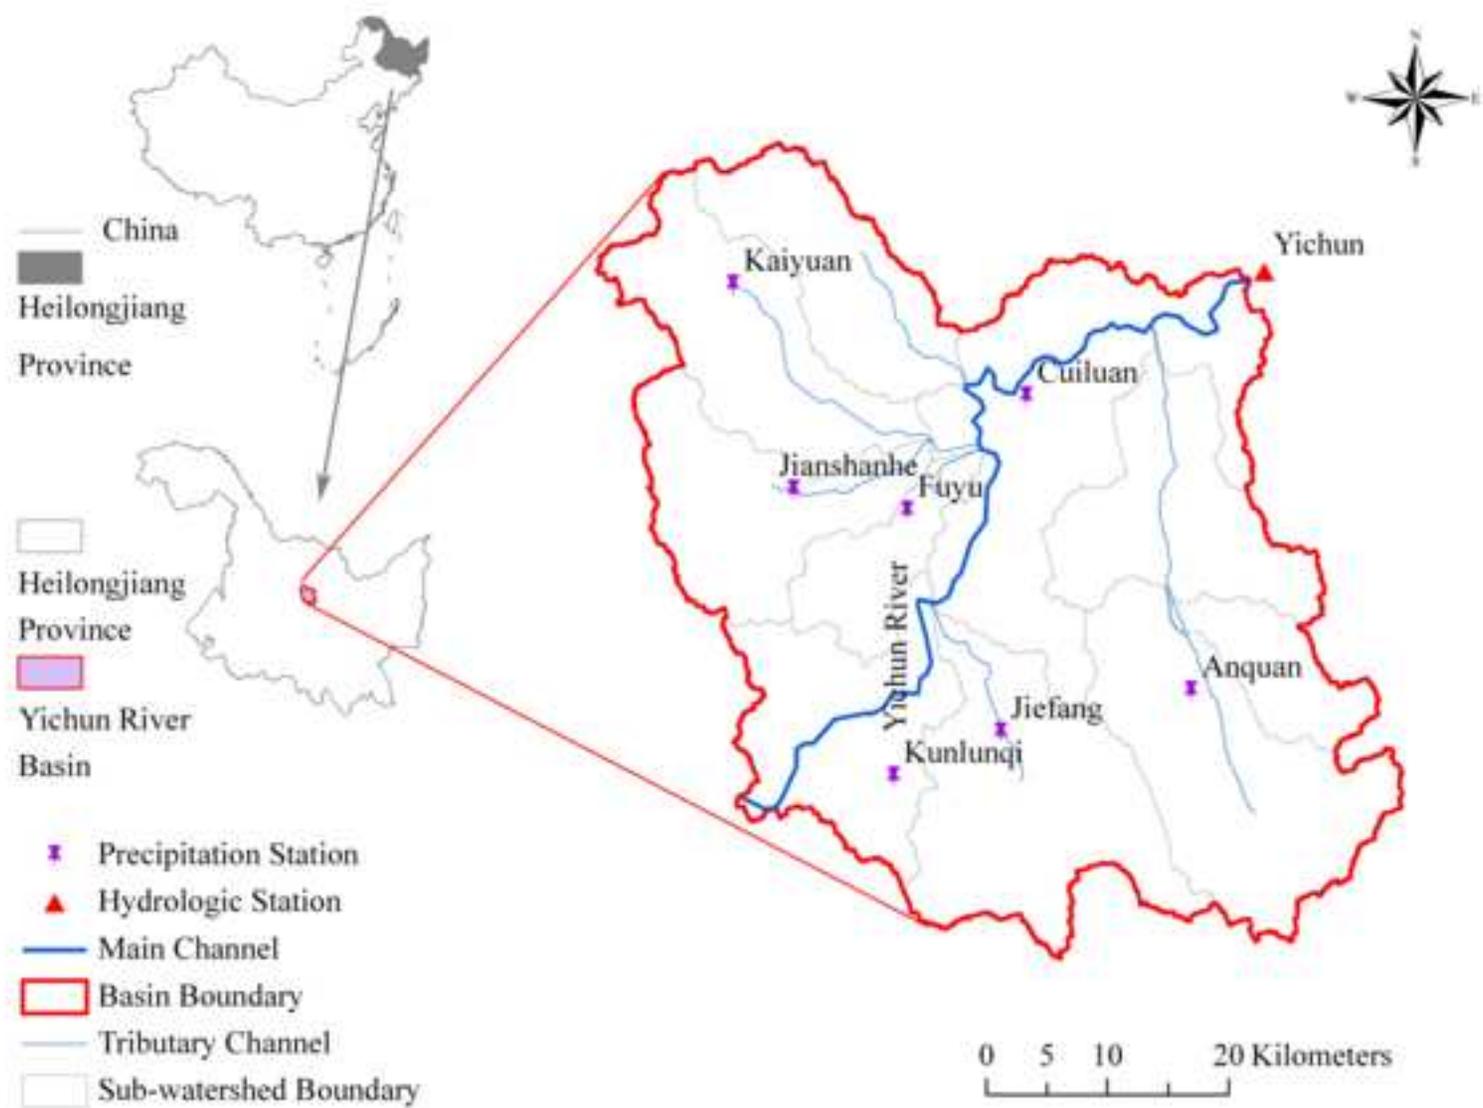

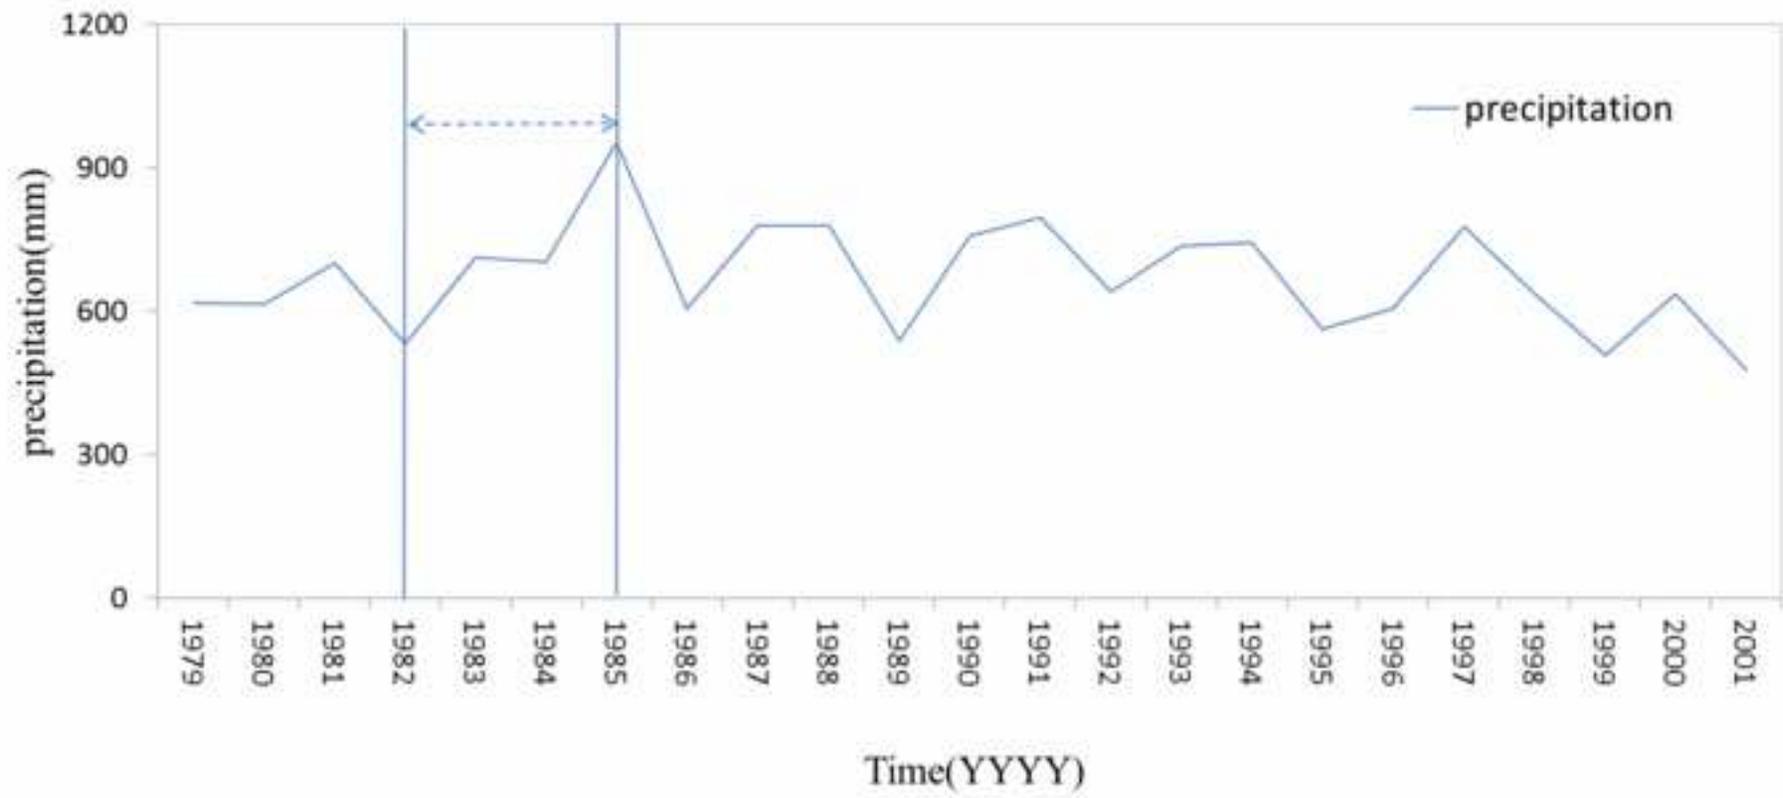

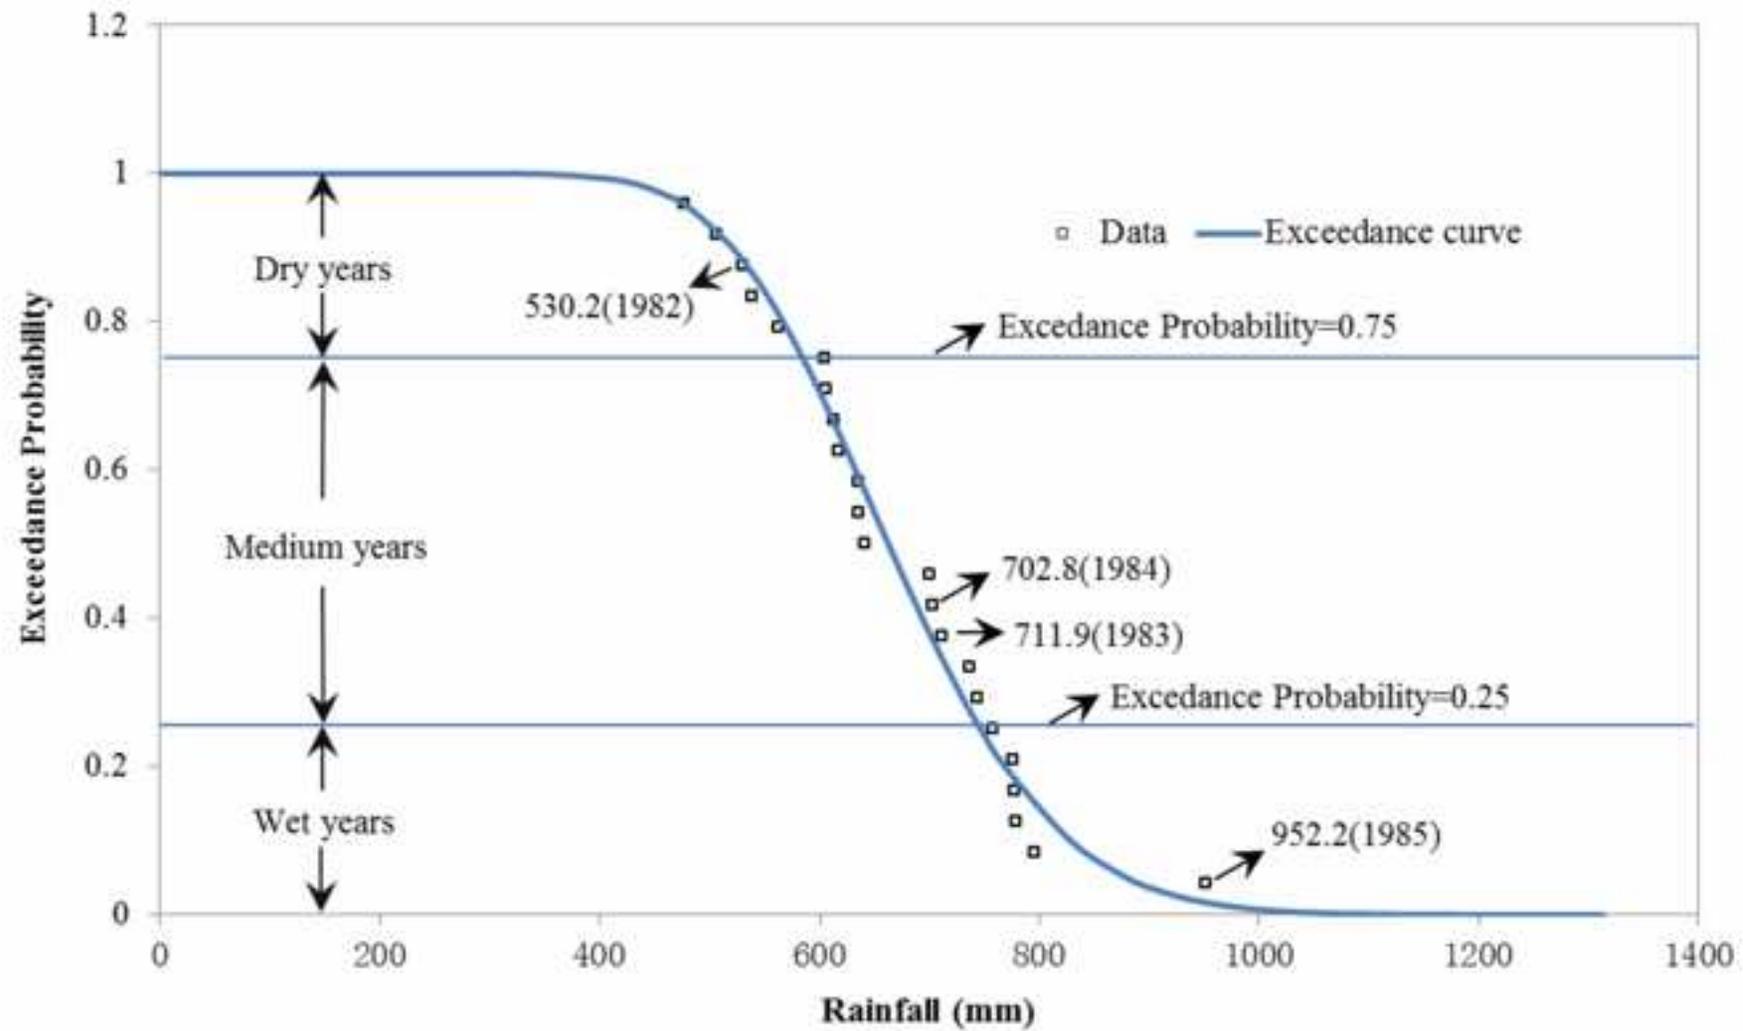

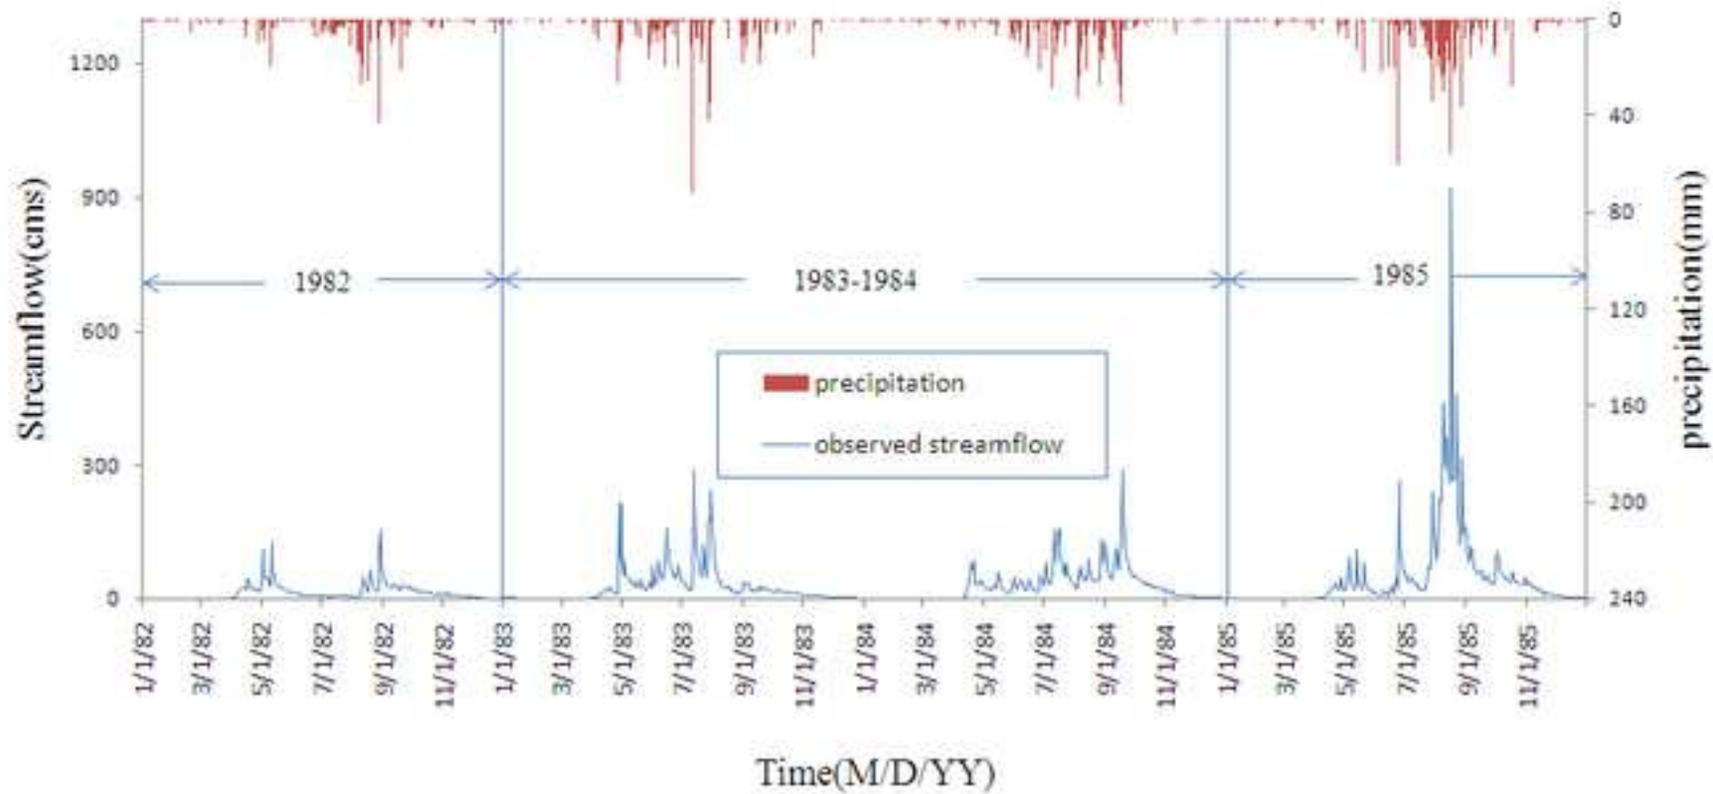


Fig. 4


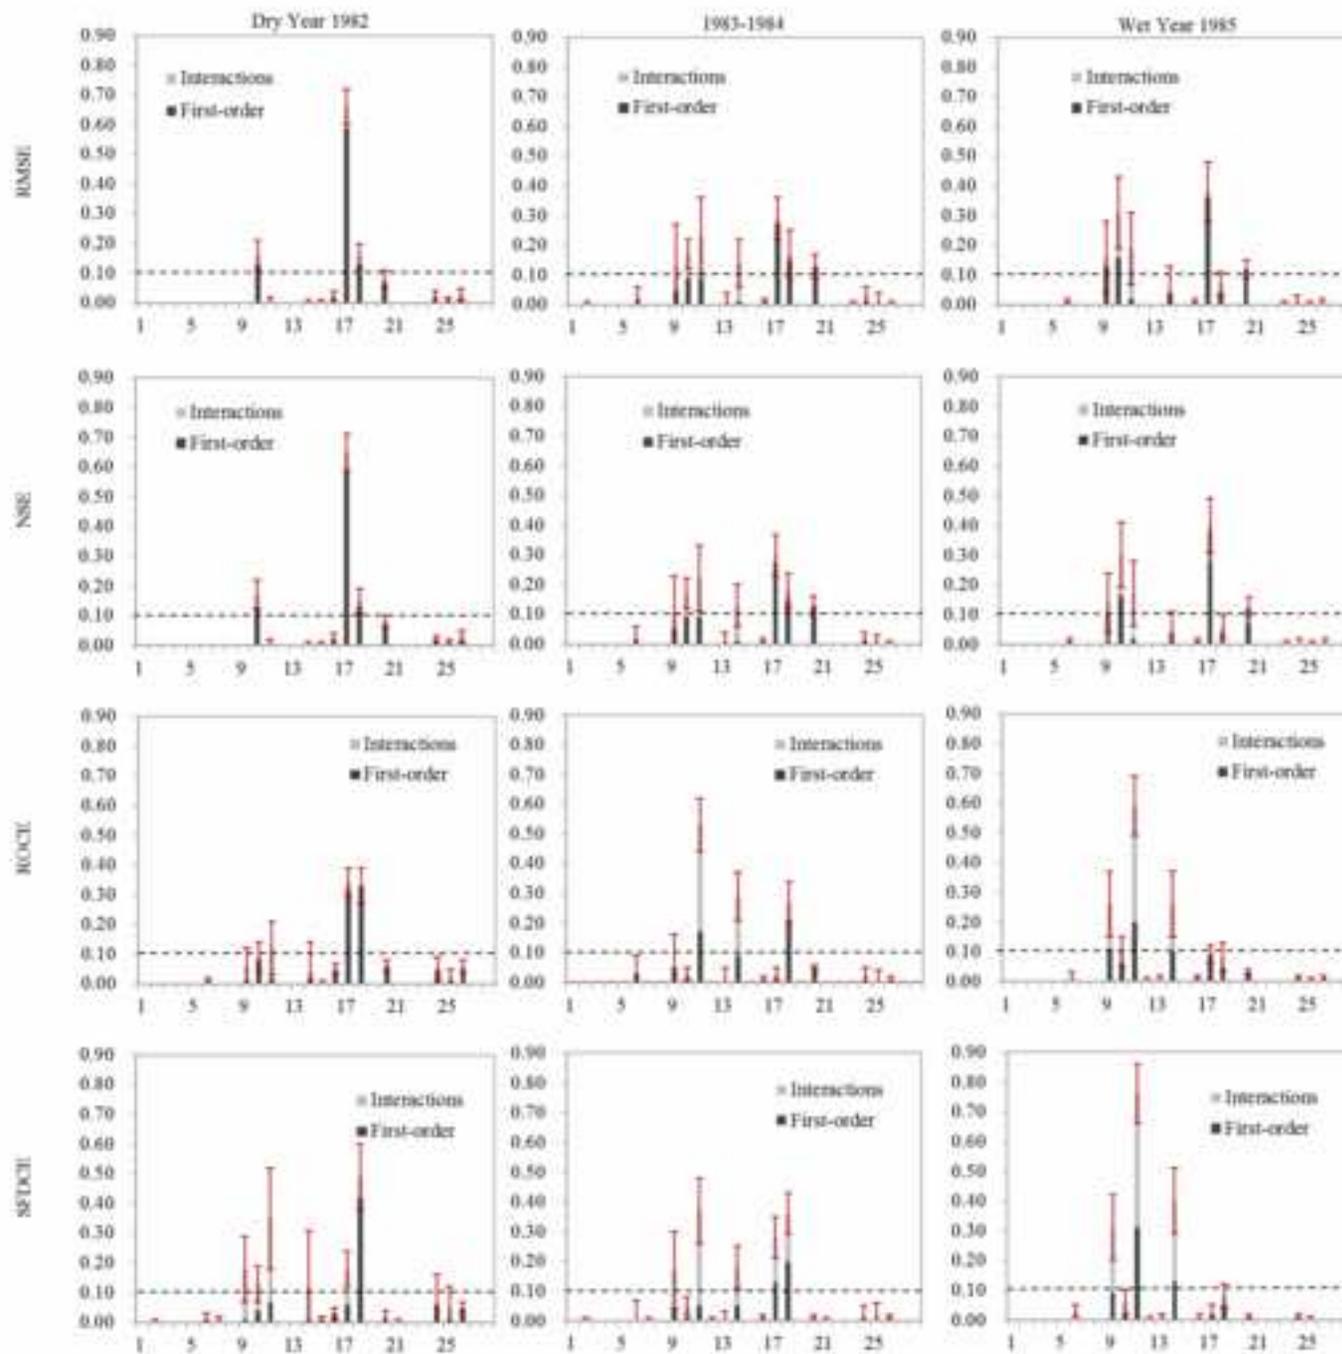


Fig. 5

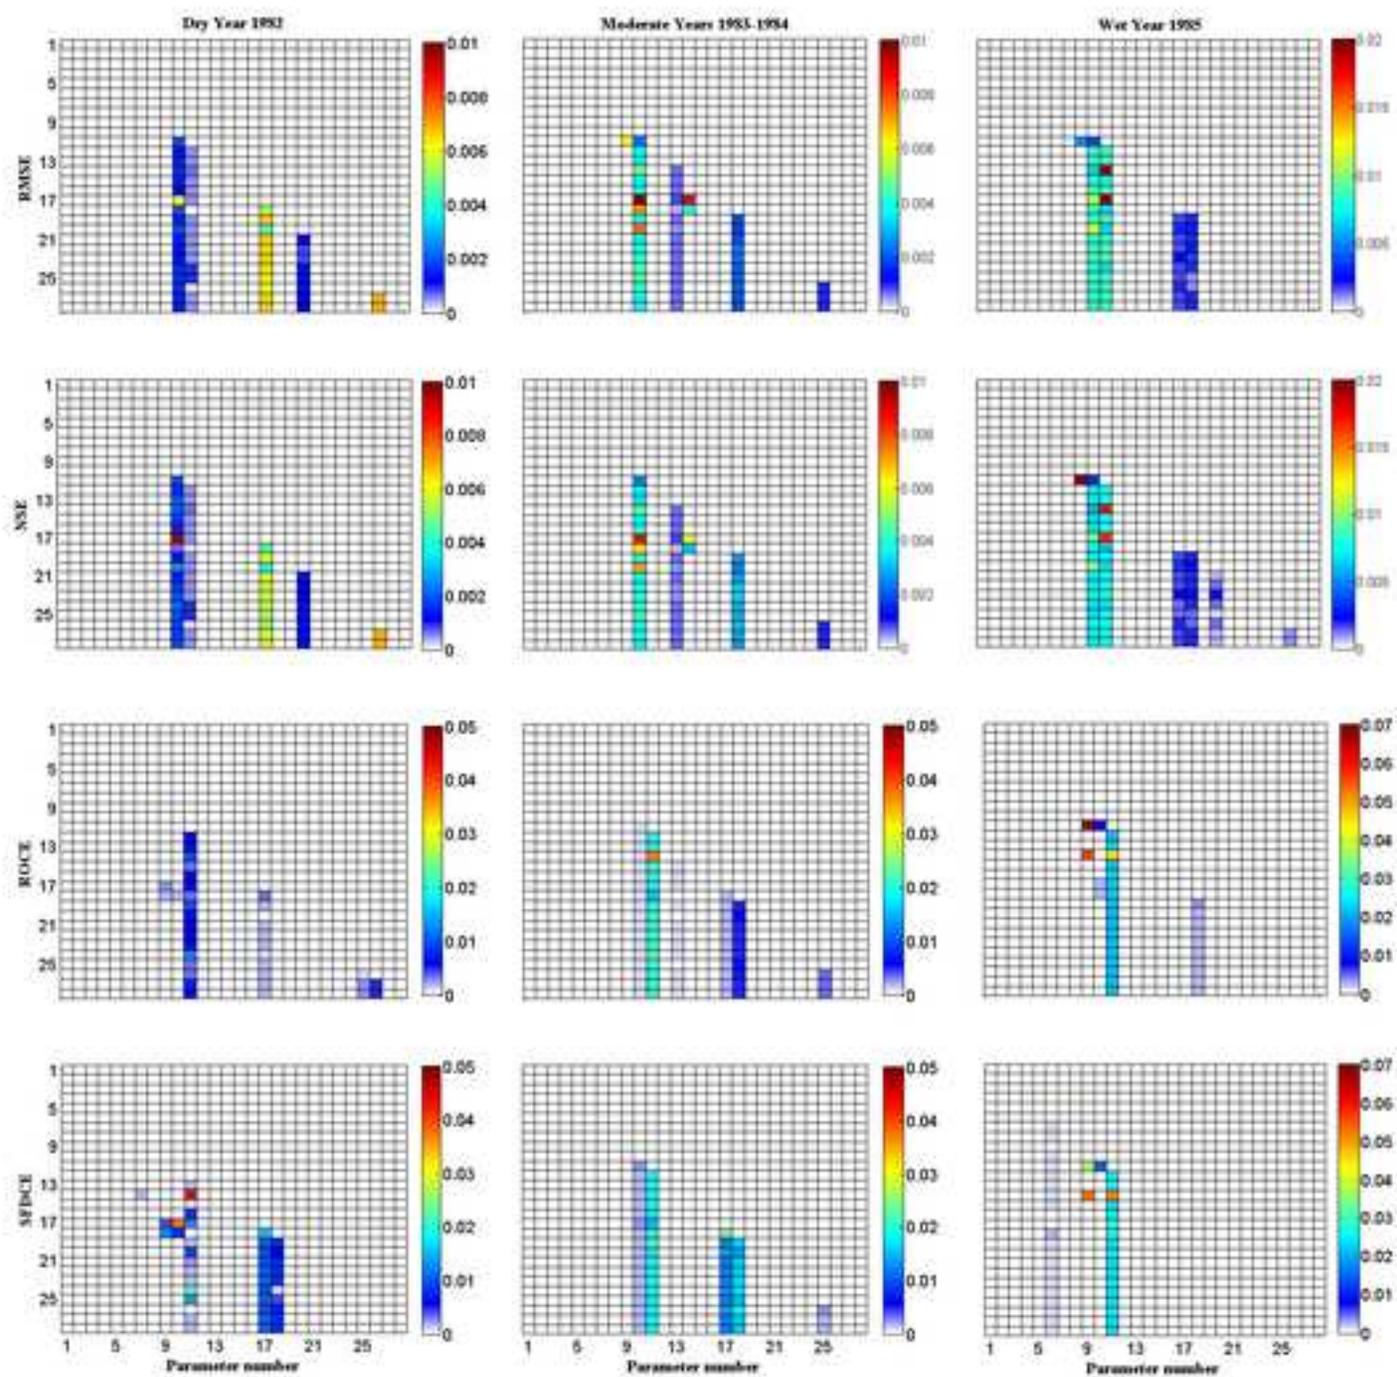

734

735 We analysed the effects of key parameters and their interactions on four metrics.

736 The parameter sensitivities vary significantly in different climate conditions.

737 Increasing precipitation can lead to more interactive effects between parameters.

738 Statistical metrics fail to identify the parameters related to hydrological metrics.

739 Sobol's method advances our understanding of the underlying hydrological
740 processes.

741

ACCEPTED MANUSCRIPT